

ZONE	REV	DESCRIPTION	REVISIONS	DATE	APPROVED
------	-----	-------------	-----------	------	----------

✓	Poles	A±0.30	B±0.20	17	131.14	121.92
02		16.94	7.62	18	138.86	129.54
03		24.56	15.24	↓	Poles	A±0.45 B±0.35
04		32.18	22.86	19	146.48	137.16
05		39.80	30.48	20	154.10	144.78
06		47.42	38.10	21	161.72	152.40
↓	Poles	A±0.35	B±0.25	22	169.34	160.02
07		55.04	45.72	23	176.96	167.64
08		62.66	53.34	24	184.58	175.26
09		70.28	60.96	↓	Poles	A±0.50 B±0.40
10		77.90	68.58	25	192.20	182.88
11		85.52	76.20	26	199.82	190.50
12		93.14	83.82	27	207.44	198.12
↓	Poles	A±0.40	B±0.30	28	215.06	205.74
13		100.76	91.44	29	222.68	213.36
14		108.38	99.06	30	230.30	220.98
15		116.00	106.68	31	237.92	228.60
16		114.30	114.30	32	236.22	236.22

Screws Torque: 12 In-Lb

Wire Range: 16~22 AWG

Rated: 15 Amperes,AC300V

Operation Temperature: -55°C~+105°C

Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ DC500V

Part

Number:

FTB-706-XXP

02~32 Poles

Material	Plating/Finish	Remark
A Insulating body PA66 94V-0		Black
B Terminals	Brass	Tin
C Screws	Steel	Nickel
D Cover	PC	
E		



HOW DER
ELECTRONIC CO.,LTD

PART NAME
Terminal Blocks

UNIT
MM

REVISION

DESIGN CHECK APPROVED DRAWING NO.

DATE

DATE




DATE

CERTIFIED



SHEET

1/1

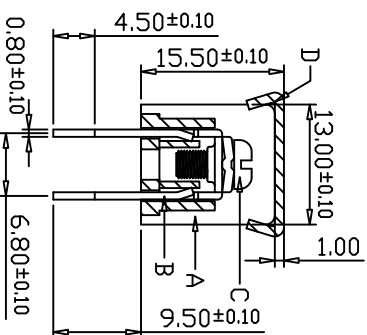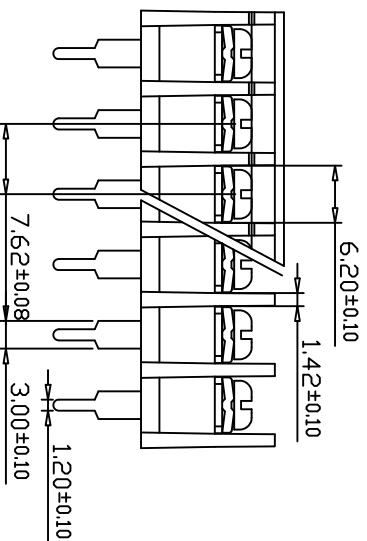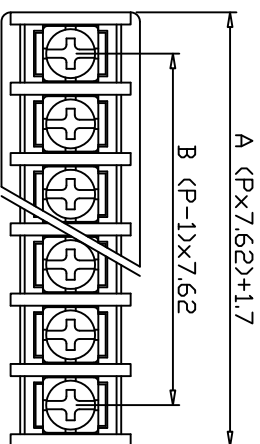

http://www.howder-tw.com
E-mail:info@howder-tw.com

Tel:886-2-2223-1026
Fax:886-2-2221-6471

