HOW DER

DATE	200900803

SPECIFICATIONS

① Housing Material: Polyamide 66(UL94V-0), Green
② Screw: M2.0 Yellow Zinc Plated Steel
③ Cage Clamp: Tin Plated Brass
④ Terminals: Tin Plated Brass

Screws Torque: 1 In-Lb
Wire Range: 16~24 AWG
Rated: 10 Amperes.AC300V
Operation Temperature: -55°C~+115°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

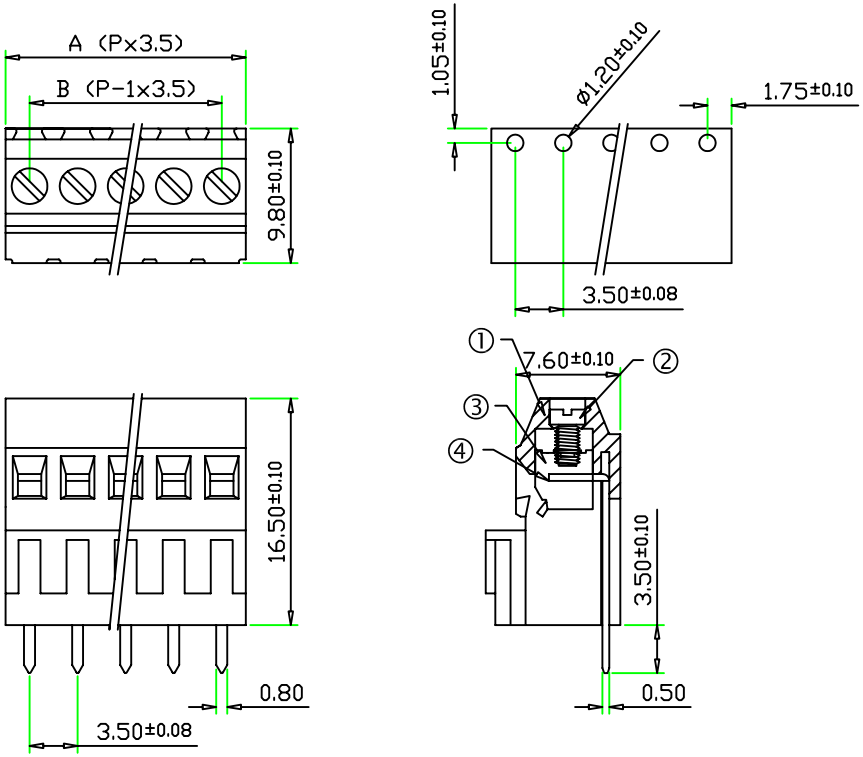

Part Number:

HD-352-□P

Pole Size 2~26P

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12
A	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	42
B	3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5

POLE	13	14	15	16	17	18	19	20	21	22	23	24	25	26
A	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5	91
B	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5

文件發行
2009. 8. 3
林姿伶

ROHS

CO/Name	HOW DER ELECTRONIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DRAWING		DATE		DRAWING NO	HD-3535002
P/Name	P.C.B. terminal block				①							
					②		APPROVED		DATE		SCALE	2:1(:)
					③						SHEET	1/1
					④		CHECK		DATE		UNIT	MM

http://www.howder-tw.com Tel:02-2223-1026
E-mail:howder.tb@msa.hinet.neta Fax:02-2221-6471