



## SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Green
- ② Screw: M2.0 Yellow Zinc Plated Steel
- ③ Cage Clamp: Tin Plated Brass
- ④ Terminals: Tin Plated Brass

Screws Torque: 1 In-Lb

Wire Range: 16~24 AWG

Rated: 10 Amperes.AC300V

Operation Temperature: -55°C~+115°C





Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

## Part Number:

# HD-381-□P

Pole Size 2~26P

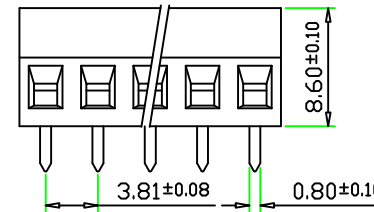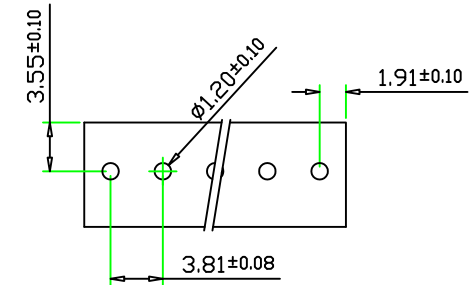

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12			
A	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.1	41.91	45.72			
B	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.1	41.91			
POLE	13	14	15	16	17	18	19	20	21	22	23	24	25	26
A	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.2	80.01	83.82	87.63	91.44	95.25	99.06
B	45.72	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.2	80.01	83.82	87.63	91.44	95.25

文件發行

2009. 8. 3

林姿伶



CO/Name	HOW DER ELECTRONIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DRAWING	DATE	DRAWING NO	HD-3838101
P/Name	P.C.B. terminal block	△			①		DRAWING	DATE		
					②		APPROVED	DATE		SCALE 2:1 ( : )
					③					SHEET 1/1
					④		CHECK	DATE		UNIT MM

http://www.howder-tw.com Tel:02-2223-1026

E-mail:howder.tb@msa.hinet.net Fax:02-2221-6471