



SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Gray
- ② Lever: Polyamide 66(UL94V-0), Gray
- ③ Terminals: Tin Plated Phosphorus Bronze

Wire Range: 16~20 AWG

Rated: 4 Amperes.AC300V

Operation Temperature: -40°C~+105°C




Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

Part Number:

HD-261-□P

Pole Size 2~24P

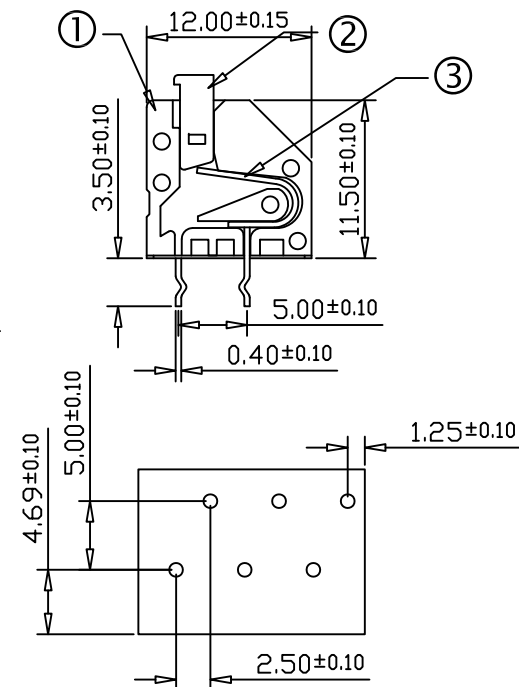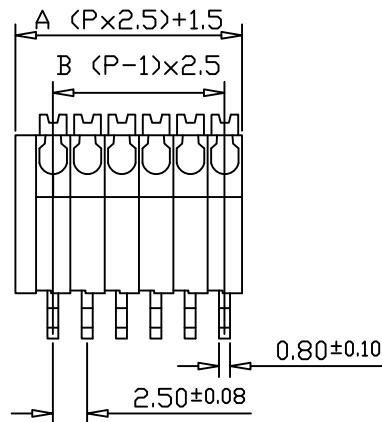

Tolerance ± 0.50

| POLE | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| A | 6.5 | 9.0 | 11.5 | 14.0 | 16.5 | 19.0 | 21.5 | 24.0 | 26.5 | 29.0 | 31.5 | 34.0 | 36.5 | 39.0 |
| B | 2.50 | 5.0 | 7.5 | 10.0 | 12.5 | 15.0 | 17.5 | 20.0 | 22.5 | 25.0 | 27.5 | 30.0 | 32.5 | 35.0 |
| POLE | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | | | | | |
| A | 41.5 | 44.0 | 46.5 | 49.0 | 51.5 | 54.0 | 56.5 | 59.0 | 61.5 | | | | | |
| B | 37.5 | 40.0 | 42.5 | 45.0 | 47.5 | 50.0 | 53.5 | 55.0 | 57.5 | | | | | |

文件發行

2019.05.03

黃琦婷



| CO/Name | HOW DER ELECTRONIC CO.,LTD | REV. | CONTENT | DATE | NO. | PART NO. | DRAWING | DATE | DRAWING NO | HD-250001 |
|---------|-------------------------------|------|----------------|--------------|-----|----------|----------|------|------------|-----------|
| P/Name | Screwless type terminal block | △ | 尺寸修改0.75修改0.80 | 2019 0123 | ① | | DRAWING | DATE | SCALE | 2:1(:) |
| | | | | | ② | | APPROVED | DATE | SHEET | 1/1 |
| | | | | | ③ | | | | UNIT | MM |
| | | | | | ④ | | CHECK | DATE | | |

http://www.howder-tw.com Tel:886-2-2223-1026

E-mail:info@howder-tw.com Fax:886-2-2221-6471