

ZONE		REV	DESCRIPTION		DATE	APPROVED
------	--	-----	-------------	--	------	----------

✓	Poles	A±0.30	B±0.20	17	142.05	132.0
02		18.30	8.25	18	150.30	140.25
03		26.55	16.50	↓	Poles	A±0.45 B±0.35
04		34.80	24.75	19	158.55	148.50
05		43.05	33.00	20	166.80	156.75
06		51.30	41.25	21	175.05	165.0
↓	Poles	A±0.35	B±0.25	22	183.30	173.25
07		59.55	49.50	23	191.55	181.50
08		67.80	57.75	24	199.80	189.75
09		76.05	66.00	↓	Poles	A±0.50 B±0.40
10		84.30	74.25	25	208.05	198.0
11		92.55	82.50	26	216.30	206.25
12		100.8	90.75	27	224.55	214.50
↓	Poles	109.05	B±0.30	28	232.80	222.75
13		A±0.40	99.00	29	241.05	231.00
14		117.30	107.25	30	249.30	239.25
15		125.55	115.50	31	257.55	247.50
16		134.28	123.75	32	265.80	255.75

Screws Torque: 12 In-Lb

Wire Range: 16~22 AWG

Rated: 20 Amperes, AC300V

Operation Temperature: -55°C~+95°C

Insulation withstands volt: AC2000V min



Insulation resistance: >1000MΩ DC500V

Part

Number:

FTB-802-XXP

02~32 Poles

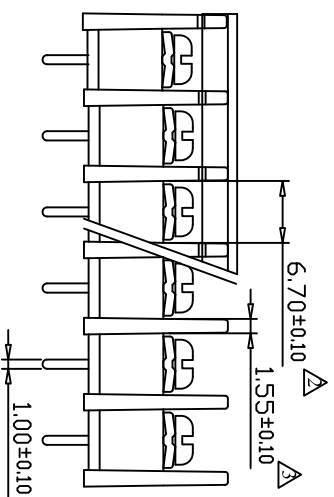

4	Size update From 14.0 to 13.9 (2017/08/09)
3	Size update From 1.65 to 1.55 (2017/08/09)
2	Size update From 6.6 to 6.7 (2017/08/09)
1	Size update From 1.65 to 1.80 (2017/08/09)

A	Insulating body	Barrier	Plating/Finish	Remark
B	Terminals	Brass	Tin	Black
C	Screws	Steel	Nickel	
D	Cover	PC		
E				



PART NAME	Terminal Blocks	UNIT	MM	REVISION
-----------	-----------------	------	----	----------

DESIGN	CHECK	APPROVED	DRAWING NO.	CERTIFIED	SHEET
DATE	DATE	DATE			1/1

http://www.howder-tw.com
E-mail:info@howder-tw.com

Tel:886-2-2223-1026
Fax:886-2-2221-6471

