





HOW DER

SPECIFICATIONS

- ① Housing Material: PA 66(UL94V-0), Black
 - ② Screw: M3.5 Nickel Plated Steel
 - ③ Terminals: Tin Plated Brass
 - ④ Cover: PC Transparent
- Screws Torque: 15.7 In-Lb
 Wire Range: 12~22 AWG
 Rated: 25 Amperes.AC 300V(UL)

Operation Temperature: -55°C~+105°C
 Insulation withstands volt: AC2000V min
 Insulation resistance: >1000MΩ or more at DC500V

Part Number:

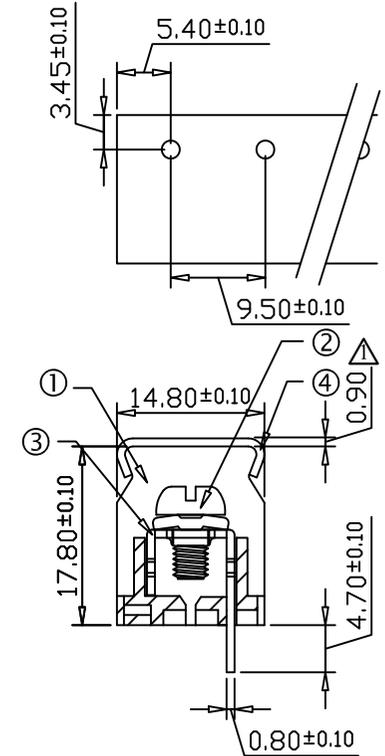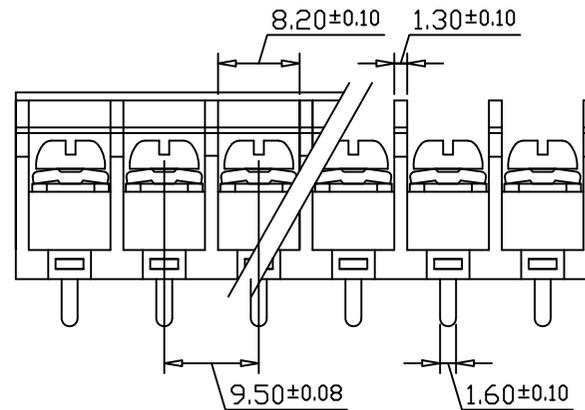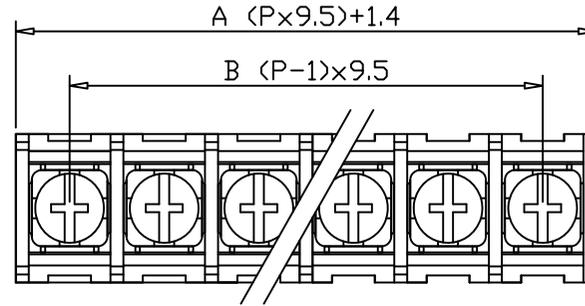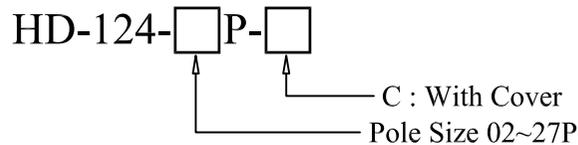

POLE	02	03	04	05	06	07	08	09	10	11	12	13	14	15
A	20.4	29.9	39.4	48.9	58.4	67.9	77.4	86.9	96.4	105.9	115.4	124.9	134.4	143.9
B	9.5	19	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133
POLE	16	17	18	19	20	21	22	23	24	25	26	27		
A	153.4	162.9	172.4	181.9	191.4	200.9	210.4	219.9	229.4	238.9	267.4	276.9		
B	142.5	152	161.5	171	180.5	190	199.5	209	218.5	228	256.5	266		

文件發行
 2021.02.17
 張芳綾



CO/Name	HOW DER ELECTRONIC CO.,LTD	REV.	CONTENT	DATE	POLES	A	B	Drawing	DATE	2009/08/25	DrawingNo	HD-12095011
P/Name	Barrier type terminal block	△	Size update From 0.8 to 0.9	2019 0528	02P~06P	±0.30	±0.20	APPROVED	DATE		Scale	2:1(:)
		△			07P~12P	±0.35	±0.25		DATE		Sheet	1/1
					13P~18P	±0.40	±0.30	CHECK	DATE		Unit	mm
					19P~24P	±0.45	±0.35		DATE			
http://www.howder-tw.com Tel:02-2223-1026					25P~30P	±0.50	±0.40					
E-mail:info@howder-tw.com Fax:02-2221-6471												