REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

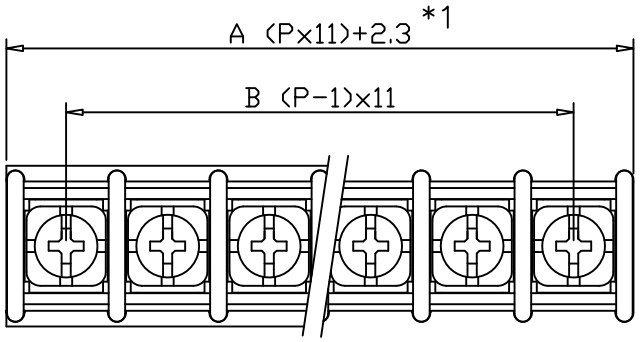

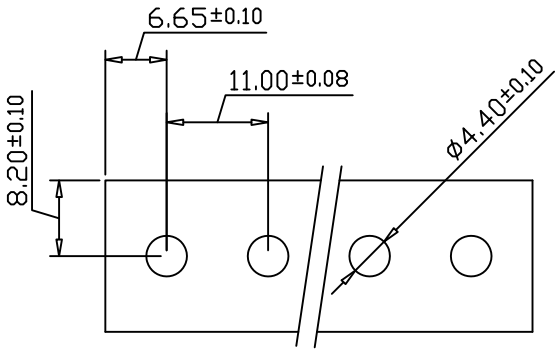

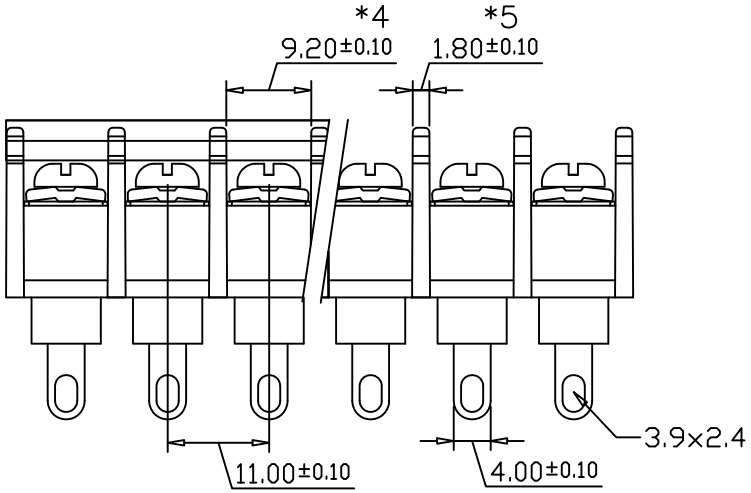

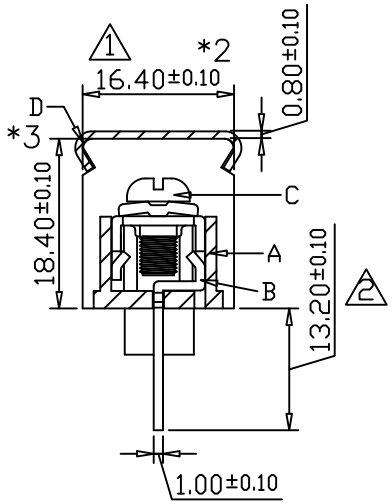

✓	Poles	A±0.35	B±0.30		17	189.3	176
	02	24.3	11		18	200.3	187
	03	35.3	22	⇩	Poles	A±0.50	B±0.45
	04	46.3	33		19	211.3	198
	05	57.3	44		20	222.3	209
	06	68.3	55		21	233.3	220
⇩	Poles	A±0.40	B±0.35		22	244.3	231
	07	79.3	66		23	255.3	242
	08	90.3	77		24	266.3	253
	09	101.3	88	⇩	Poles	A±0.55	B±0.50
	10	112.3	99		25	277.3	264
	11	123.3	110		26	288.3	275
	12	134.3	121		27	299.3	286
⇩	Poles	A±0.45	B±0.40		28	310.3	297
	13	145.3	132		29	321.3	308
	14	156.3	143		30	332.3	319
	15	167.3	154		31	343.3	330
	16	178.3	165		32	354.3	341

Screws Torque: 15.7 In-Lb
Wire Range: 12~22 AWG
Rated: 25 Amperes.AC300V
Operation Temperature: -55°C~+95°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ DC500V

Part Number:

HI-303-□P-□
- □ (02~32 Poles)
- □ (With Cover)

	Material		Plating/Finish	Remark
A	Insulating body	Barrier	PA66	Black
B	Terminals	Brass	Tin	
C	Screws	Steel	Nickel	
D	Cover	PC		
E				

2 Size update From 13.4 to 13.2 (2025/03/07)
1 Size update From 16.3 to 16.4 (2025/03/07)

文件發行 2025.03.14 JULIA

HOW DER ELECTRONIC CO.,LTD
http://www.howder-tw.com
E-mail:info@howder-tw.com
Tel:886-2-2223-1026
Fax:886-2-2221-6471

DESIGN	CHECK	APPROVED	DRAWING NO.	PART NAME	UNIT	REVISION
				Teminal Blocks	MM	
DATE 2019/04/26	DATE	DATE	3011006	CERTIFIED		SHEET 1/1