

# HOW DER

## SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Black
- ② Screw: M4.0 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass
- ④ Cover: PC Transparent

Screws Torque: 15.7 In-Lb

Wire Range: 12~22 AWG

Rated: 25 Amperes.AC300V

Operation Temperature: -55°C~+95°C

Insulation withstands volt: AC2000V min


Insulation resistance: >1000MΩ or more at DC500V

## Part Number:

HD-305-PH-

C: With Cover

Pole Size 02~30P

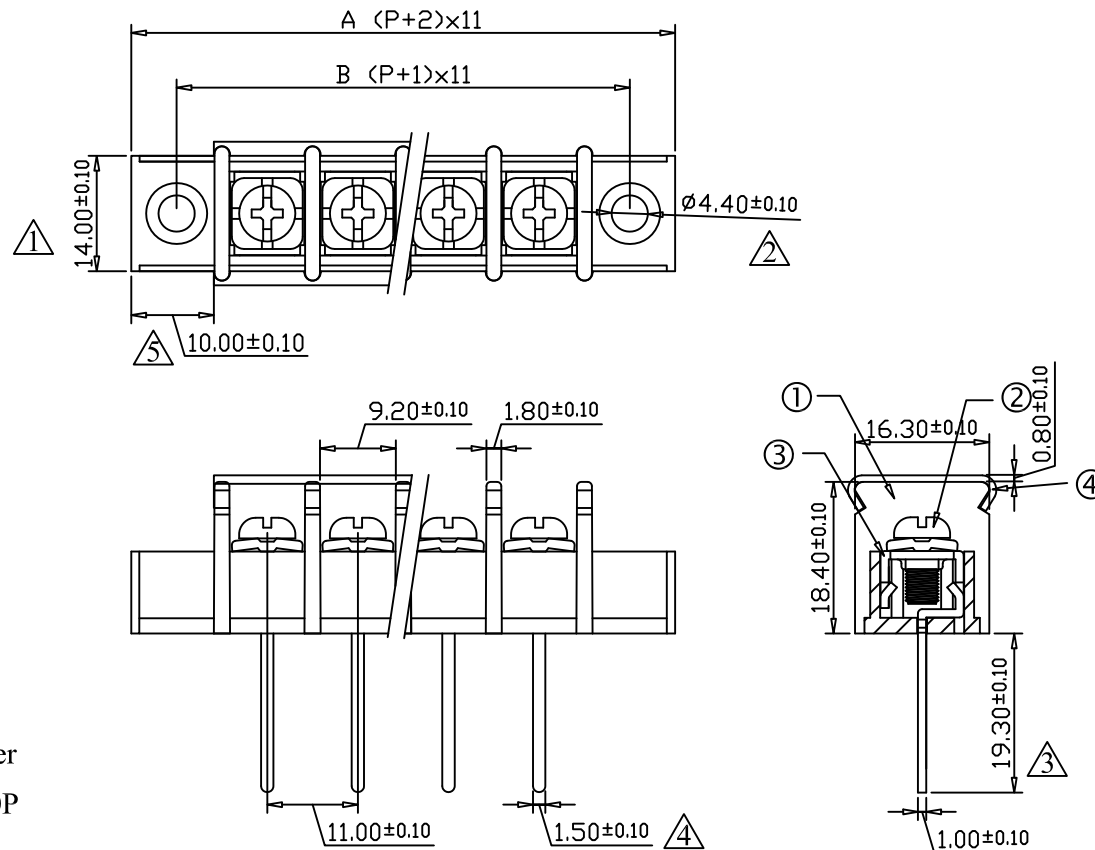

POLE	02	03	04	05	06	07	08	09	10	11	12	13	14	15	
A	44	55	66	77	88	99	110	121	132	143	154	165	176	187	
B	33	44	55	66	77	88	99	110	121	132	143	154	165	176	
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	198	209	220	231	242	253	264	275	286	297	308	319	330	341	352
B	187	198	209	220	231	242	253	264	275	286	297	308	319	330	341

文件發行  
2017.06.27  
黃琦婷



CO/Name	HOW DER ELECTRONIC CO.,LTD	REV.	CONTENT	DATE	POLES	A	B	Drawing	DATE	2009/09/18	DrawingNo	HD-3001109
P/Name	Barrier type terminal block	①	新增尺寸14mm	2010/03/30	02P~06P	±0.30	±0.20	APPROVED	DATE		Scale	2:1( : )
		②	修改尺寸4.2修改4.4	2010/04/27	07P~12P	±0.35	±0.25				Sheet	1/1
		③	修改尺寸19.0修改19.3	2010/04/27	13P~18P	±0.40	±0.30	CHECK	DATE		Unit	mm
		④	修改尺寸1.6修改1.5	2010/04/27	19P~24P	±0.45	±0.35					
http://www.howder-tw.com Tel:02-2223-1026		⑤	修改尺寸10.3修改10.0	2010/04/27	25P~30P	±0.50	±0.40					
E-mail:howder.tb@msa.hinet.net Fax:02-2221-6471												