HOW DER

DATE 2009/08/21

SPECIFICATIONS

① Housing Material: PA 66(UL94V-0), Black
② Screw: M4.0 Nickel Plated Steel
③ Terminals: Tin Plated Brass
④ Cover: PC Transparent/PE Cover Protective Film

Screws Torque: 12 In-Lb
Wire Range: 8~20 AWG
Rated: 50 Amperes.AC300V
Operation Temperature: -55°C~+105°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

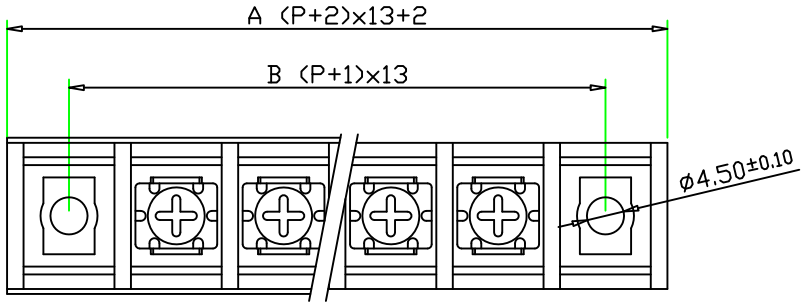

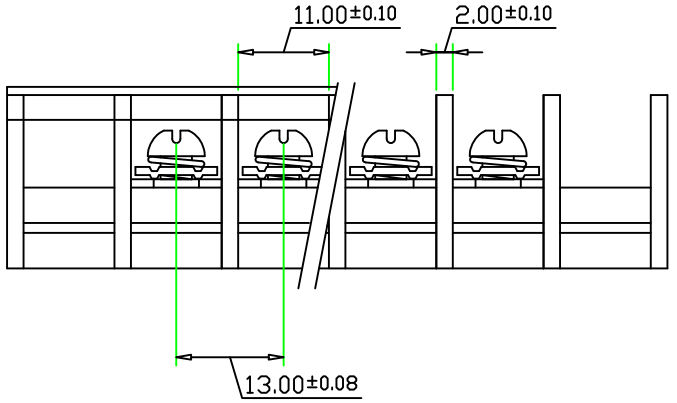



Part Number:

HD-150-□PH-□

C: With Cover
Pole Size 2~25P

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	54	67	80	93	106	119	132	145	158	171	184	197	210	223
B	39	52	65	78	91	104	117	130	143	156	169	182	195	208

POLE	16	17	18	19	20	21	22	23	24	25
A	236	249	262	275	288	301	314	327	340	353
B	221	234	247	260	273	286	299	312	325	338

文件發行
2009.8.21
林姿伶

ROHS

CO/Name	HOW DER ELECTRIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DrawingNo		DATE		DrawingNo	HD-15013001
P/Name	Barrier type terminal block				①							
					②		APPROVED		DATE		Scale	2:1(:)
					③							
http://www.howder-tw.com Tel:02-2223-1026					④		CHECK		DATE		Sheet	1/1
E-mail:howder.tb@msa.hinet.net Fax:02-2221-6471											Unit	mm