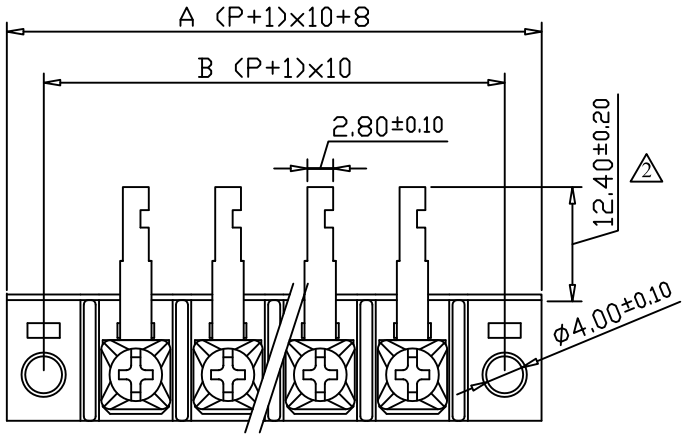

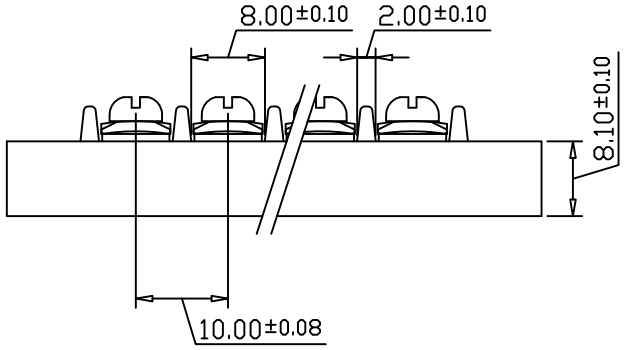

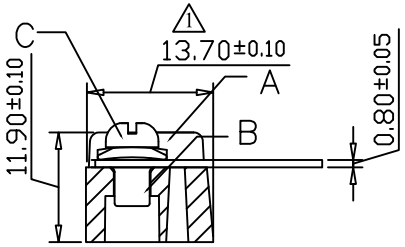

✓	Poles	A±0.30	B±0.20		17	188.0	180.0
	02	38.0	30.0		18	198.0	190.0
	03	48.0	40.0	⇩	Poles	A±0.45	B±0.35
	04	58.0	50.0		19	208.0	200.0
	05	68.0	60.0		20	218.0	210.0
	06	78.0	70.0		21	228.0	220.0
⇩	Poles	A±0.35	B±0.25		22	238.0	230.0
	07	88.0	80.0		23	248.0	240.0
	08	98.0	90.0		24	258.0	250.0
	09	108.0	100.0	⇩			
	10	118.0	110.0				
	11	128.0	120.0				
	12	138.0	130.0				
⇩	Poles	A±0.40	B±0.30				
	13	148.0	140.0				
	14	158.0	150.0				
	15	168.0	160.0				
	16	178.0	170.0				

Screws Torque: 7.0 In-Lb
Wire Range: 14~22 AWG
Rated: 10 Amperes.AC250V
Operation Temperature: -55°C~+115°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ DC500V

Part Number:

FTB-10-G-XXPH

02~24 Poles

			Plating/Finish	Remark
A	Insulating body	Barrier		Black
B	Terminals	Brass	Tin	
C	Screws	Steel	Nickel	
D				
E				

2 Size update From 10.52 to 12.4 (2021/11/02)

1 Size update From 13.8 to 13.7 (2020/04/10)

文件發行 2021.11.02 黃琦婷

ROHS

HOW DER
ELECTRONIC CO.,LTD

DESIGN	CHECK	APPROVED	DRAWING NO.
DATE 2009/09/03	DATE	DATE	

PART NAME	UNIT	REVISION
Teminal Blocks	MM	
CERTIFIED		SHEET 1/1

http://www.howder-tw.com
E-mail:info@howder-tw.com
Tel:886-2-2223-1026
Fax:886-2-2221-6471