



HOW DER

DATE 2009/08/21

SPECIFICATIONS

- ① Housing Material: Phenolic , Black
- ② Screw: M4.0 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Screws Torque: 9 In-Lb
 Wire Range: 12~18 WG
 Rated: 20 Amperes.AC250V
 Operation Temperature: -55°C~+150°C
 Insulation withstands volt: AC2000V min
 Insulation resistance: >1000Ω or more at DC500V

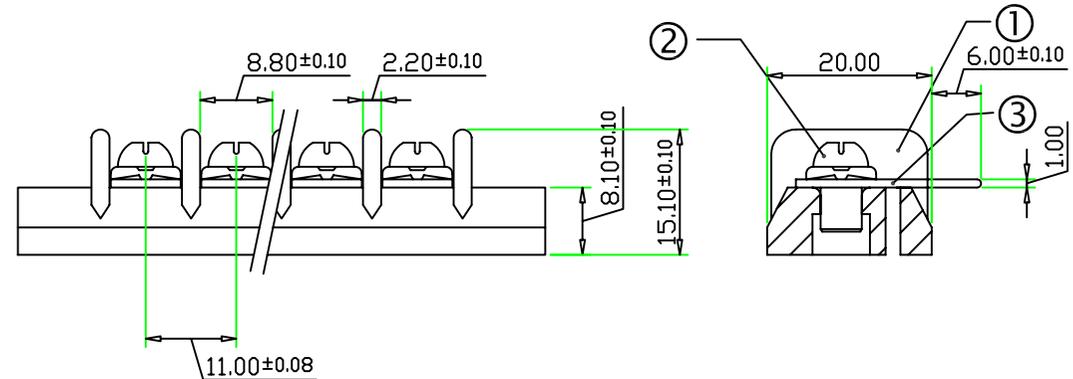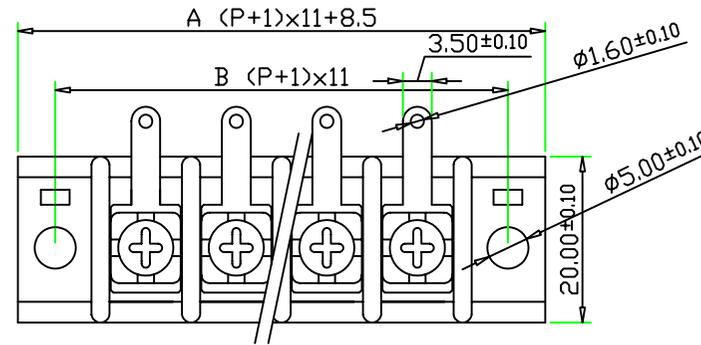

Part Number:

HD-323-PH

Pole Size 2~24P

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	41.5	52.5	63.5	74.5	85.5	96.5	107.5	118.5	129.5	140.5	151.5	162.5	173.5	184.5
B	33	44	55	66	77	88	99	110	121	132	143	154	165	176
POLE	16	17	18	19	20	21	22	23	24					
A	195.5	206.5	217.5	228.5	239.5	250.5	261.5	272.5	283.5					
B	187	198	209	220	231	242	253	264	275					

文件發行

2009.8.21

林姿伶

ROHS

CO/Name	HOW DER ELECTRIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DrawingNo		DATE		DrawingNo	HD-3201106
P/Name	Double row type terminal block				①						Scale	2:1(:)
					②		APPROVED		DATE		Sheet	1/1
					③						Unit	mm
					④		CHECK		DATE			
http://www.howder-tw.com Tel:02-2223-1026												
E-mail:howder.tb@msa.hinet.net Fax:02-2221-6471												