

ZONE		REV	DESCRIPTION		DATE	APPROVED
------	--	-----	-------------	--	------	----------

✓	Poles	A±0.30	B±0.20	17	158.55	148.5
02		34.8	24.75	18	166.8	156.75
03		43.05	33.00	↓	Poles	A±0.45 B±0.35
04		51.30	41.25	19	175.05	165.0
05		59.55	49.5	20	183.3	173.25
06		67.80	57.75	21	191.55	181.5
↓	Poles	A±0.35	B±0.25	22	199.8	189.75
07		76.05	66.00	23	208.05	198.0
08		84.30	74.25	24	216.3	206.25
09		92.55	82.50	↓	Poles	A±0.50 B±0.40
10		100.8	90.75	25	224.55	214.5
11		109.05	99.00	26	232.8	222.75
12		117.3	107.25	27	241.05	231.0
↓	Poles	A±0.40	B±0.30	28	249.3	239.25
13		125.55	115.5	29	257.55	247.5
14		134.28	123.75	30	265.8	255.75
15		142.05	132.0			
16		150.3	140.25			

Screws Torque: 12 In-Lb
Wire Range: 16~22 AWG
Rated: 20 Amperes.AC300V
Operation Temperature: -55°C~+95°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ DC500V

Part
Number:
FTB-803-XXPH

02~30 Poles

		Plating/Finish	Remark
4	A Insulating body	Barrier	Black
3	B Terminals	Brass	Tin
2	C Screws	Steel	Nickel
1	D Cover	PC	
E			






HOW DER
ELECTRONIC CO.,LTD

PART NAME	UNIT	REVISION
Terminal Blocks	MM	

DESIGN	CHECK	APPROVED	DRAWING NO.	CERTIFIED	SHEET
DATE	DATE	DATE			1/1



http://www.howder-tw.com
E-mail:info@howder-tw.com
Tel:886-2-2223-1026
Fax:886-2-2221-6471

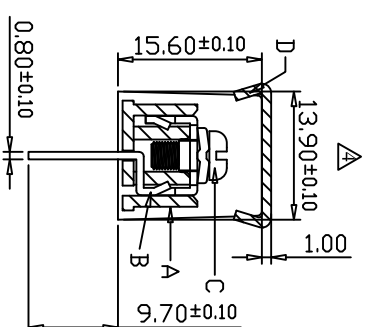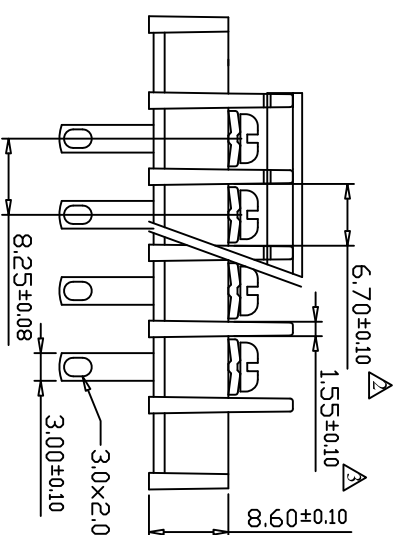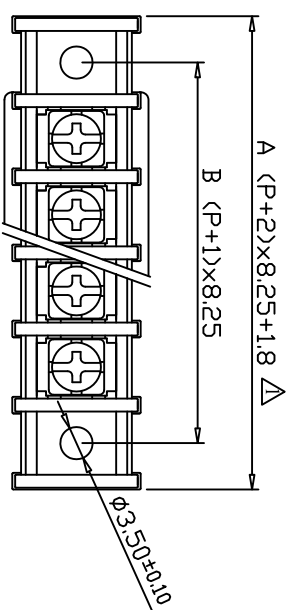

8

7

6

5

4

3

2

1