

✓ Poles	A±0.30	B±0.20	17	85.98	80.0
02	10.98	5.0	18	90.98	85.0
03	15.98	10.0	↓ Poles	A±0.45	B±0.35
04	20.98	15.0	19	95.98	90.0
05	25.98	20.0	20	100.98	95.0
06	30.98	25.0	21	105.98	100.0
↓ Poles	A±0.35	B±0.25	22	110.98	105.0
07	35.98	30.0	23	115.98	110.0
08	40.98	35.0	24	120.98	115.0
09	45.98	40.0	↓ Poles	A±0.50	B±0.40
10	50.98	45.0	25	125.98	120.0
11	55.98	50.0	26	130.98	125.0
12	60.98	55.0			
↓ Poles	A±0.40	B±0.30			
13	65.98	60.0			
14	70.98	65.0			
15	75.98	70.0			
16	80.98	75.0			

Screws Torque: 7.0 In-Lb
 Wire Range: 16~22 AWG
 Rated: 10 Amperes, AC250V
 Operation Temperature: -55°C~+100°C
 Insulation withstands volt: AC2000V min
 Insulation resistance: >2000MΩ/DC500V

Part Number:

TS-501-XXP

02~26 Poles

Material	Plating/Finish	Remark
A Insulating body	PA66 UL 94V-0	Green
B Terminal	Brass	Tin
C Screw	Steel	Yellow Zinc
D Spring:	Steel	
E		

△3 Size update From 3.4 to 3.5
 (2019/04/08)
 △2 Size update From 0.5 to 0.98
 (2019/04/08)
 △1 Size update From 1.06 to 1.00
 (2010/04/01)






ELECTRONIC CO.,LTD
 PART NAME
 Terminal Blocks

UNIT
 MM



REVISION
 SHEET
 1/1

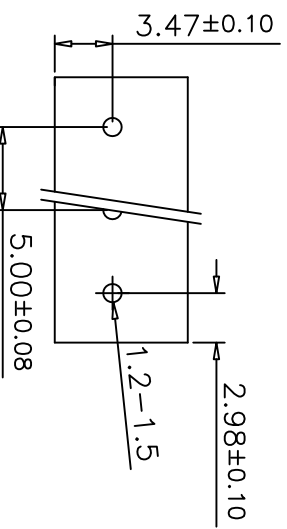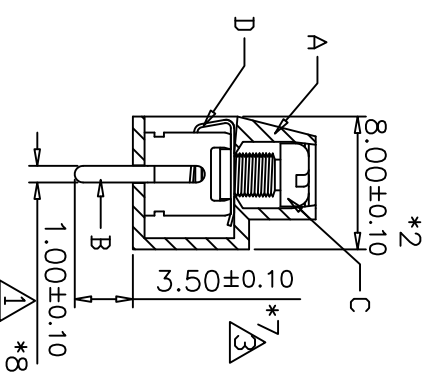

DESIGN
 DATE
 2009/09/03

CHECK
 DATE
 2020/07/02

APPROVED
 DATE

DRAWING NO.
 CERTIFIED



SHEET
 1/1