

✓ Poles	A±0.30	B±0.20	17	85.98	80.0
02	10.98	5.0	18	90.98	85.0
03	15.98	10.0	↓ Poles	A±0.45	B±0.35
04	20.98	15.0	19	95.98	90.0
05	25.98	20.0	20	100.98	95.0
06	30.98	25.0	21	105.98	100.0
↓ Poles	A±0.35	B±0.25	22	110.98	105.0
07	35.98	30.0	23	115.98	110.0
08	40.98	35.0	24	120.98	115.0
09	45.98	40.0	↓ Poles	A±0.50	B±0.40
10	50.98	45.0	25	125.98	120.0
11	55.98	50.0	26	130.98	125.0
12	60.98	55.0			
↓ Poles	A±0.40	B±0.30			
13	65.98	60.0			
14	70.98	65.0			
15	75.98	70.0			
16	80.98	75.0			

Screws Torque: 2 In-Lb

Wire Range: 14~22 AWG

Rated: 15 Amperes, AC300V

Operation Temperature: -55°C~+100°C



Insulation withstands volt: AC2000V min

Insulation resistance: >2000MΩ/DC500V

Part Number:

TS-505-XXP

02~26 Poles

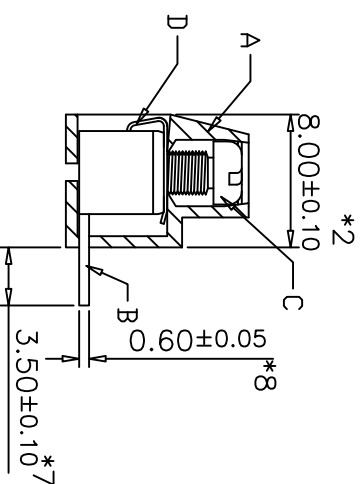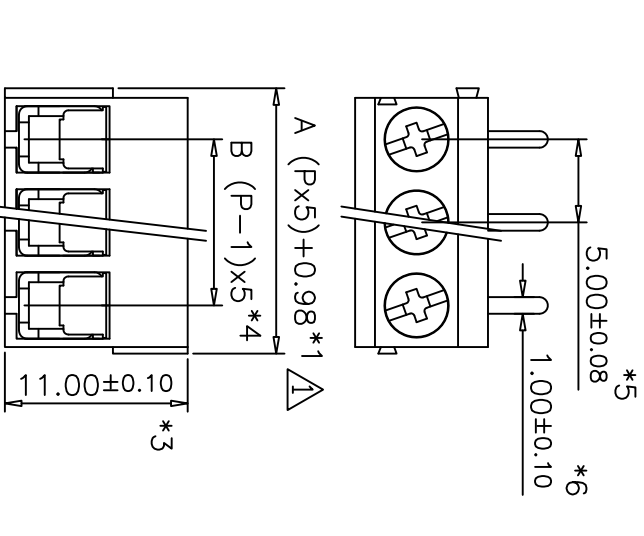

Size update From 0.5 to 0.98
(2019/04/08)

Material	Plating/Finish	Remark
A Insulating body PA66 UL 94V-0		Green
B Terminal Brass	Tin	
C Screw Steel	Yellow Zinc	
D Spring: Steel		
E		



HOW DER
ELECTRONIC CO.,LTD

PART NAME
Terminal Blocks

UNIT
MM

REVISION

DESIGN	CHECK	APPROVED	DRAWING NO.
DATE	DATE	DATE	
2009/09/03			



SHEET
1/1

