


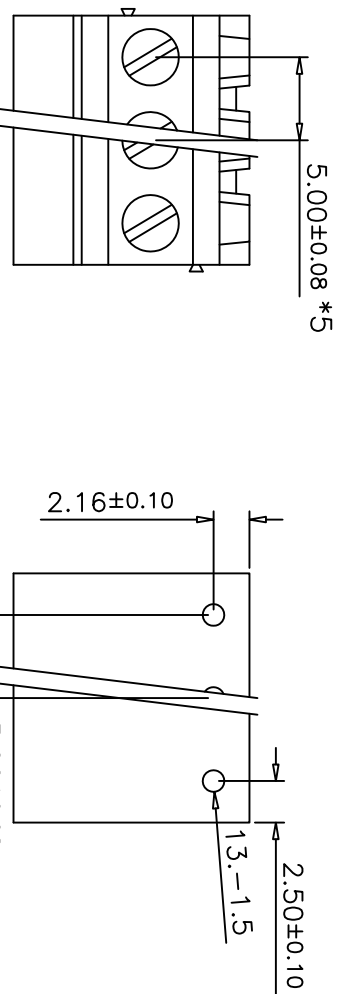

✓ Poles	A±0.30	B±0.20	17	85.60	80.0
02	10.60	5.0	18	90.60	85.0
03	15.60	10.0	↓ Poles	A±0.45	B±0.35
04	20.60	15.0	19	95.60	90.0
05	25.60	20.0	20	100.60	95.0
06	30.60	25.0	21	105.60	100.0
↓ Poles	A±0.35	B±0.25	22	110.60	105.0
07	35.60	30.0	23	115.60	110.0
08	40.60	35.0	24	120.60	115.0
09	45.60	40.0	↓ Poles	A±0.50	B±0.40
10	50.60	45.0	25	125.60	120.0
11	55.60	50.0	26	130.60	125.0
12	60.60	55.0			
↓ Poles	A±0.40	B±0.30			
13	65.60	60.0			
14	70.60	65.0			
15	75.60	70.0			
16	80.60	75.0			

Screws Torque: 7.0 In-Lb

Wire Range: 16~22 AWG

Rated: 10 Amperes, AC250V

Operation Temperature: -55°C~+95°C


Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ DC500V

Part Number:

TS-500BF-XXP

02~26 Poles

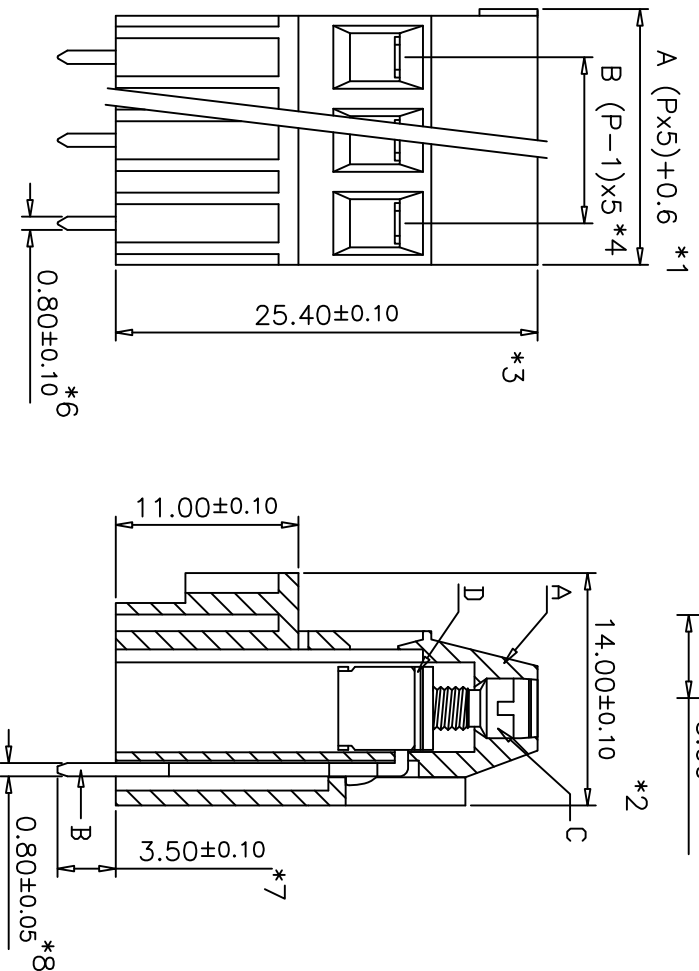

Size update From 0.85 to 0.80
(2019/08/28)

Size update From 14.4 to 14.0
(2019/02/13)

Material	Plating/Finish	Remark
A Insulating body PA66 UL 94V-0		Green
B Terminal Brass	Tin	
C Screw Steel	Zinc	
D Cage Clamp Brass	Nickel	
E		

	HOW DER ELECTRONIC CO.,LTD	PART NAME	UNIT	REVISION
		Terminal Blocks	MM	

DESIGN	CHECK	APPROVED	DRAWING NO.	CERTIFIED	SHEET
DATE	DATE	DATE			1/1

