
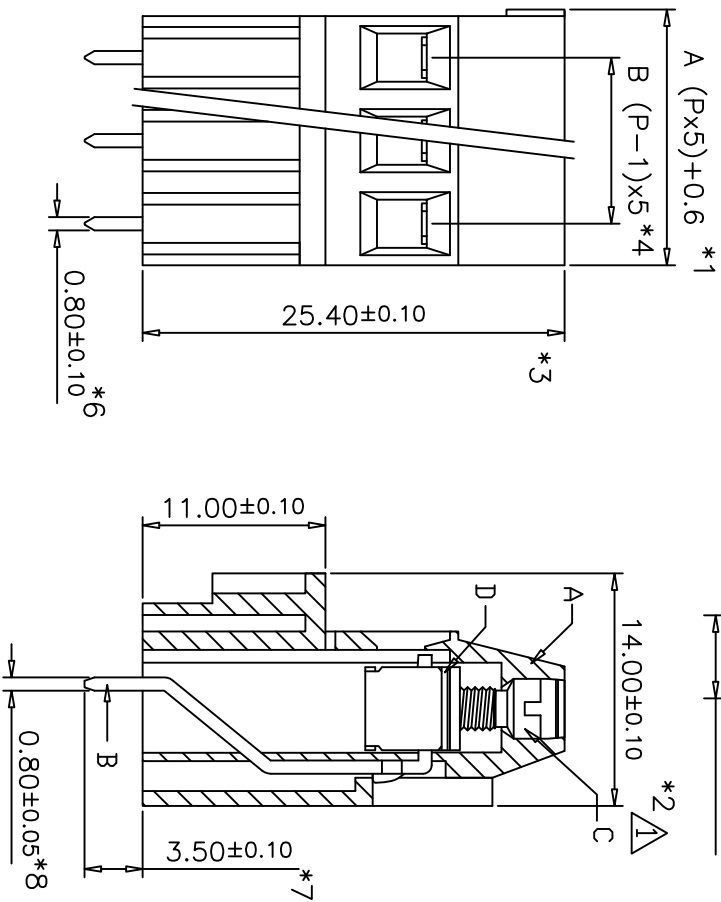


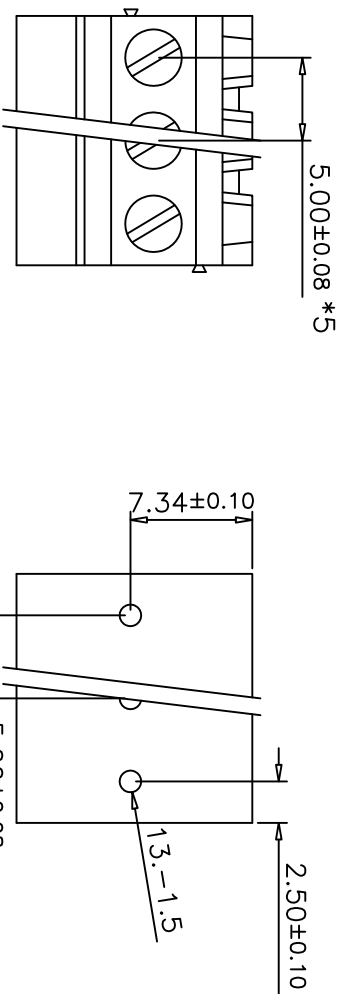

✓	Poles	A±0.30	B±0.20		17	85.60	80.0
	02	10.60	5.0		18	90.60	85.0
	03	15.60	10.0	↑	Poles	A±0.45	B±0.35
	04	20.60	15.0		19	95.60	90.0
	05	25.60	20.0		20	100.60	95.0
	06	30.60	25.0		21	105.60	100.0
↑	Poles	A±0.35	B±0.25		22	110.60	105.0
	07	35.60	30.0		23	115.60	110.0
	08	40.60	35.0		24	120.60	115.0
	09	45.60	40.0	↑	Poles	A±0.50	B±0.40
	10	50.60	45.0		25	125.60	120.0
	11	55.60	50.0		26	130.60	125.0
	12	60.60	55.0				
↑	Poles	A±0.40	B±0.30				
	13	65.60	60.0				
	14	70.60	65.0				
	15	75.60	70.0				
	16	80.60	75.0				


Screws Torque: 7.0 In-Lb
Wire Range: 16~22 AWG
Rated: 10 Amperes, AC250V
Operation Temperature: -55°C~+95°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ DC500V

Part Number:

TS-500BT-XXP

02~26 Poles

Material		Plating/Finish	Remark
A	Insulating body PA66 UL 94V-0		Green
B	Terminal	Brass	Tin
C	Screw	Steel	Zinc
D	Cage Clamp	Brass	Nickel
E			



HOW DER

ELECTRONIC CO., LTD

PART NAME	Terminal Blocks
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

UNIT	MM
------	----

REVISION

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

