


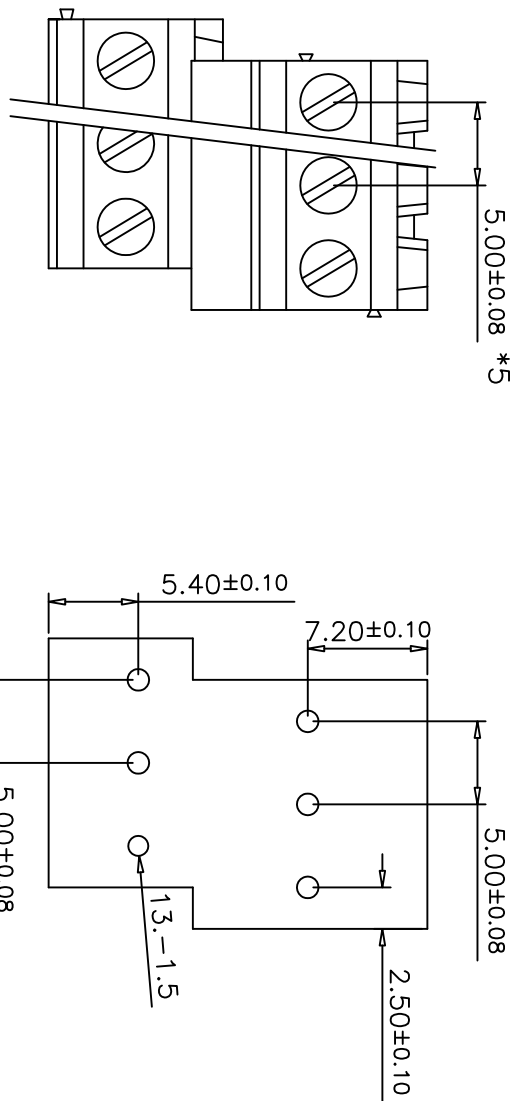


✓ Poles	A±0.30	B±0.20	17	87.5	80.0
02	12.5	5.0	18	92.5	85.0
03	17.5	10.0	↓ Poles	A±0.45	B±0.35
04	22.5	15.0	19	97.5	90.0
05	27.5	20.0	20	102.5	95.0
06	32.5	25.0	21	107.5	100.0
↓ Poles	A±0.35	B±0.25	22	112.5	105.0
07	37.5	30.0	23	117.5	110.0
08	42.5	35.0	24	122.5	115.0
09	47.5	40.0	↓ Poles	A±0.50	B±0.40
10	52.5	45.0	25	127.5	120.0
11	57.5	50.0	26	132.5	125.0
12	62.5	55.0			
↓ Poles	A±0.40	B±0.30			
13	67.5	60.0			
14	72.5	65.0			
15	77.5	70.0			
16	82.5	75.0			

Screws Torque: 7.0 In-Lb
Wire Range: 16~22 AWG
Rated: 10 Amperes, AC250V
Operation Temperature: -55°C~+95°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ DC500V

Part Number:

TS-500BRT-XXP

02~26 Poles

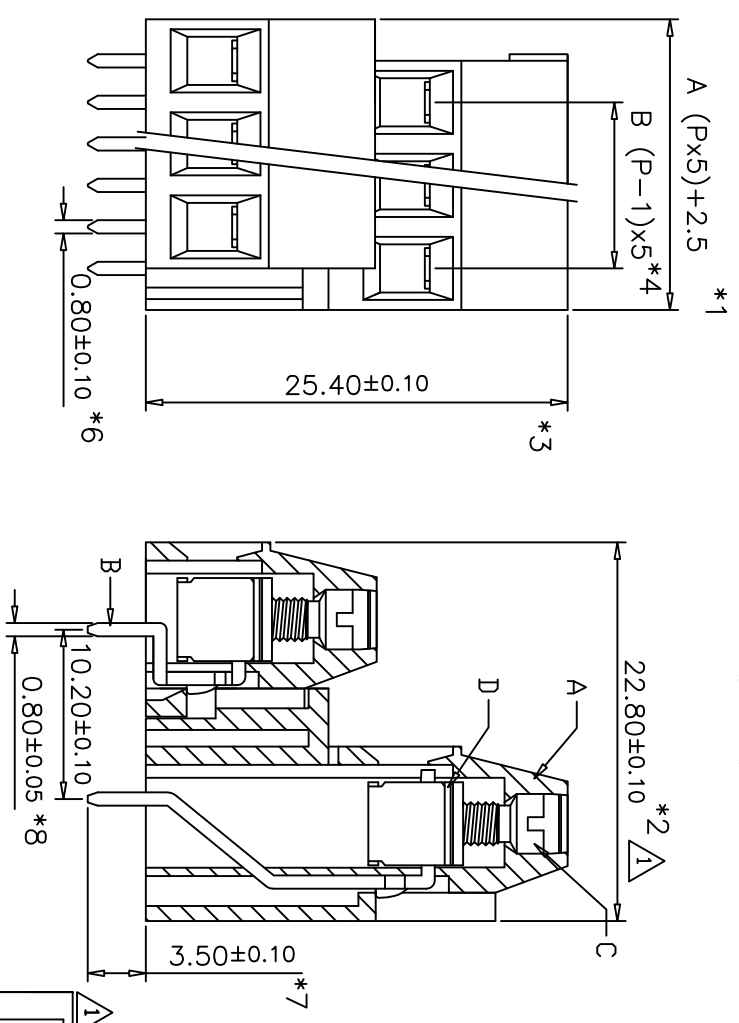

Material	Plating/Finish	Remark
A Insulating body PA66 UL 94V-0		Green
B Terminal Brass	Tin	
C Screw Steel	Zinc	M2.6
D Cage Clamp Brass	Nickel	
E		

DESIGN ELECTRONIC CO.,LTD	CHECK	APPROVED	DRAWING NO.	PART NAME	UNIT	REVISION
				P.C.B Terminal Blocks	MM	

DATE	DATE	DATE	CERTIFIED	SHEET
2009/09/03				1/1

