


✓	Poles	A±0.30	B±0.20
02	15.98	10.0	
03	25.98	20.0	
04	35.98	30.0	
05	45.98	40.0	
06	55.98	50.0	
↓	Poles	A±0.35	B±0.25
07	65.98	60.0	
08	75.98	70.0	
09	85.98	80.0	
10	95.98	90.0	
11	105.98	100.0	
12	115.98	110.0	

Screws Torque: 7.0 In-Lb
 Wire Range: 16~22 AWG
 Rated: 10 Amperes, AC250V
 Operation Temperature: -55°C~+100°C
 Insulation withstands volt: AC2000V min
 Insulation resistance: >2000MΩ/DC500V

Part Number:

TS-501-10-XXP

02~12 Poles

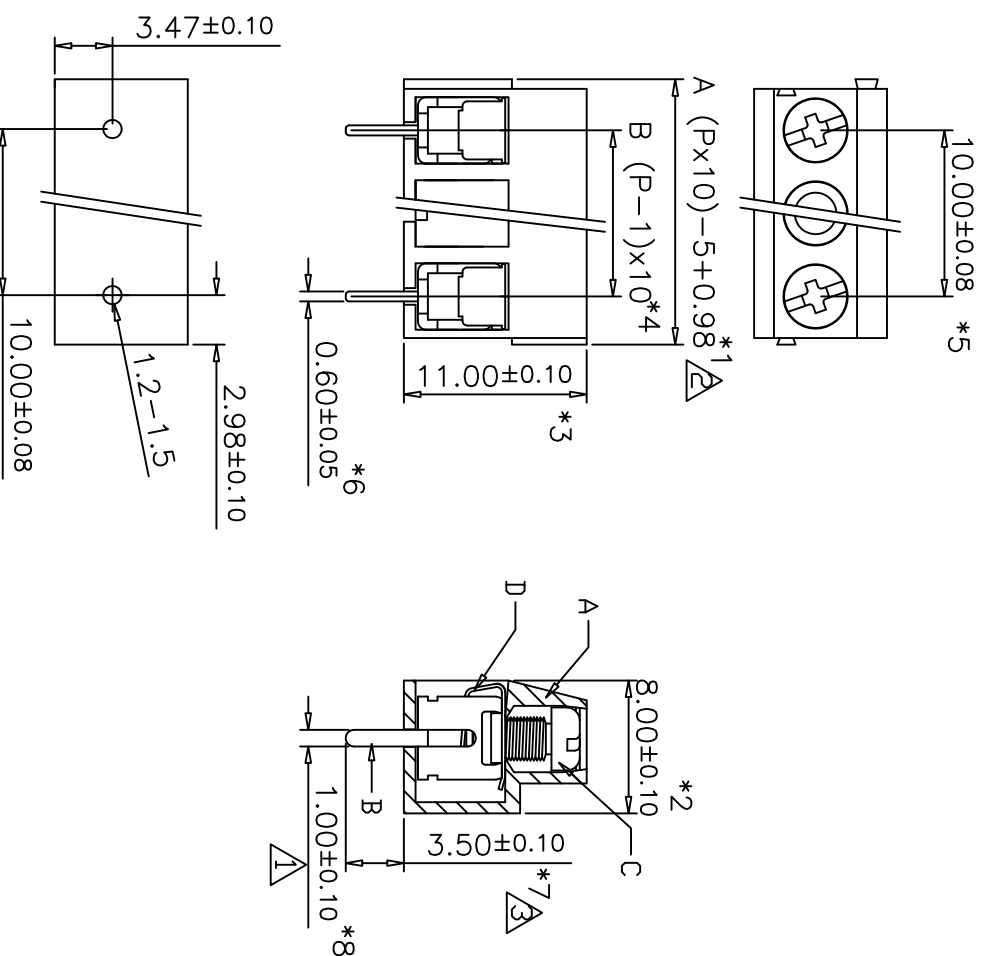

- Size update From 3.4 to 3.5 (2019/04/08)
- Size update From 0.5 to 0.98 (2019/04/08)
- Size update From 1.06 to 1.00 (2010/04/01)



HOW DER
ELECTRONIC CO.,LTD

PART NAME
Terminal Blocks

UNIT
MM

REVISION

DESIGN	CHECK	APPROVED	DRAWING NO.
DATE	DATE	DATE	
2009/09/03			

CERTIFIED



SHEET

1/1