HOW DER

DATE 20090610

SPECIFICATIONS

① Housing Material: Polyamide 66(UL94V-0), Green
② Screw: M2.6 Zinc Plated Steel
③ Terminals: Tin Plated Brass
④ Wire Clamp: Nickel Plated Brass

Screws Torque: 3.5 In-Lb
Wire Range: 14~18 AWG
Rated: 15 Amperes.AC250V
Operation Temperature: -55°C~+100°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

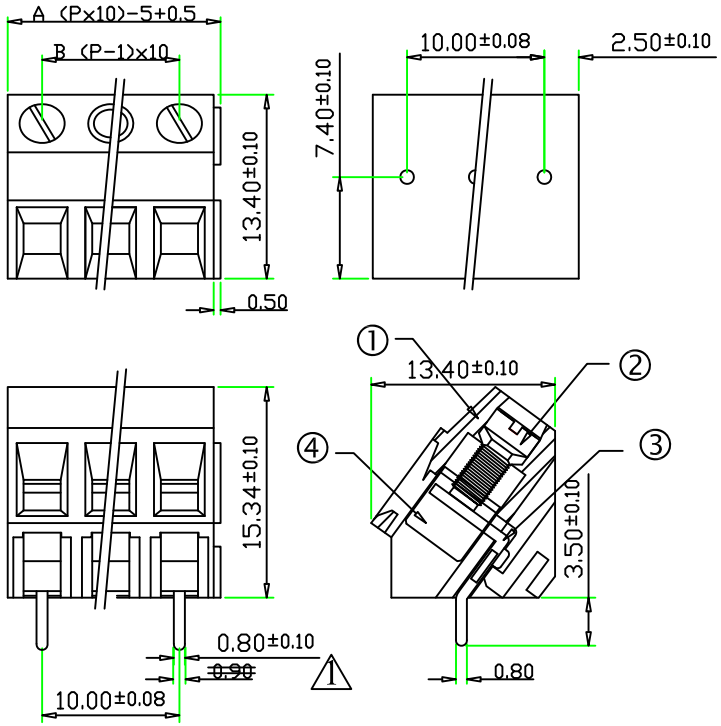

Part Number:

TS-504-10-□P

Pole Size 2~12P

Tolerance ±0.5

POLE	2	3	4	5	6	7	8	9	10	11	12
A	15.5	25.5	35.5	45.5	55.5	65.5	75.5	85.5	95.5	105.5	115.5
B	10	20	30	40	50	60	70	80	90	100	110

文件發行
2010.04.20
林姿伶

ROHS

CO/Name	HOW DER ELECTRIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DRAWING		DATE		DRAWING NO	TS-50050014
P/Name	Barrier type terminal block	⚠1	尺寸修正0.9修改0.8	20100420	①							
					②		APPROVED		DATE		SCALE	2:1(:)
					③						SHEET	1/1
http://www.howder-tw.com Tel:02-2223-1026					④		CHECK		DATE		UNIT	MM
E-mail:howder.tb@msa.hinet.neta Fax:02-2221-6471												