HOW DER

DATE 20090810

SPECIFICATIONS

① Housing Material: Polyamide 66(UL94V-0), Green
② Lever: Polyamide 66(UL94V-0), Orange
③ Terminals: Tin Plated Brass
④ Contact: Stainless Strip Steel

Wire Range: 20~26 AWG
Rated: 5 Amperes.AC150V
Operation Temperature: -55°C~+115°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

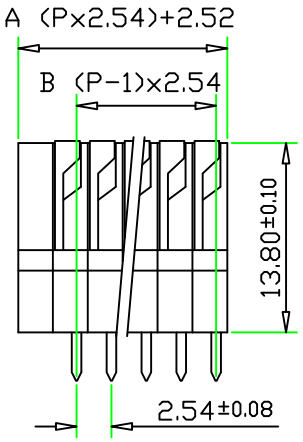

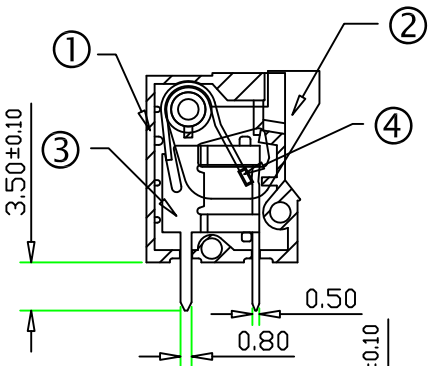



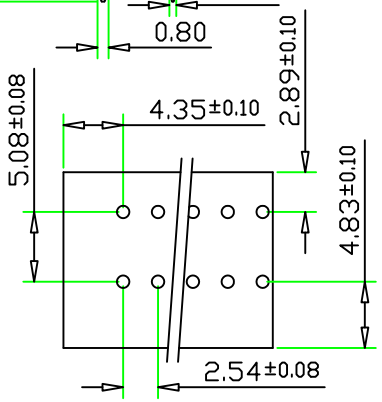

Part Number:

HD-531-□P

Pole Size 2~24P

Tolerance ± 0.50

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	7.6	10.14	12.68	15.22	17.76	20.3	22.84	25.38	27.92	30.46	33	35.54	38.08	40.62
B	2.54	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4	27.94	30.48	33.02	35.56

POLE	16	17	18	19	20	21	22	23	24
A	43.16	45.7	48.24	50.78	53.32	55.86	58.4	60.94	63.48
B	38.1	40.64	43.18	45.72	48.26	50.8	53.34	55.88	58.42

文件發行
2009.8.10
林姿伶

ROHS

CO/Name	HOW DER ELECTRIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DRAWING		DATE		DRAWING NO	HD-5325401
P/Name	Screwless type terminal block	1			①							
					②		APPROVED		DATE		SCALE	2:1(:)
					③						SHEET	1/1
http://www.howder-tw.com Tel:02-2223-1026					④		CHECK		DATE		UNIT	MM
E-mail:howder.tb@msa.hinet.neta Fax:02-2221-6471												