HOW DER

DATE	2009/10/07

SPECIFICATIONS

① Housing Material: Polyamide 66(UL94V-0), Black
② Screw: M3.0 Nickel Plated Steel
③ Terminals: Tin Plated Brass
④ Cover: PC Transparent

Screws Torque: 12 In-Lb
Wire Range: 14~18 AWG
Rated: 20 Amperes.AC300V
Operation Temperature: -55°C~+95°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

Part Number:

HD-817-□P-□

C:With Cover

Pole Size 2~30P

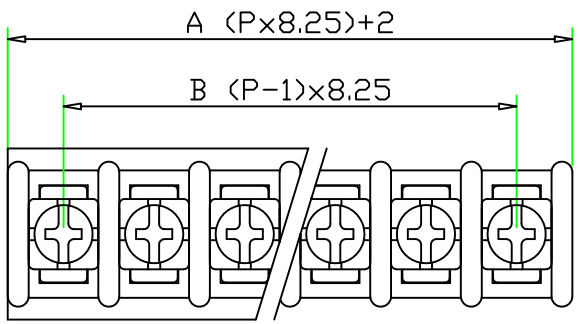

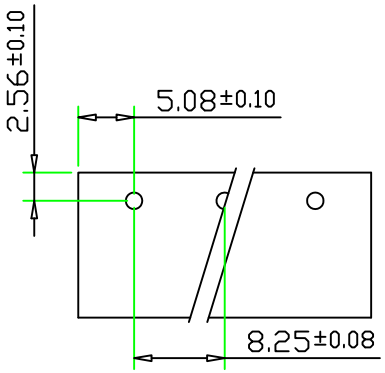

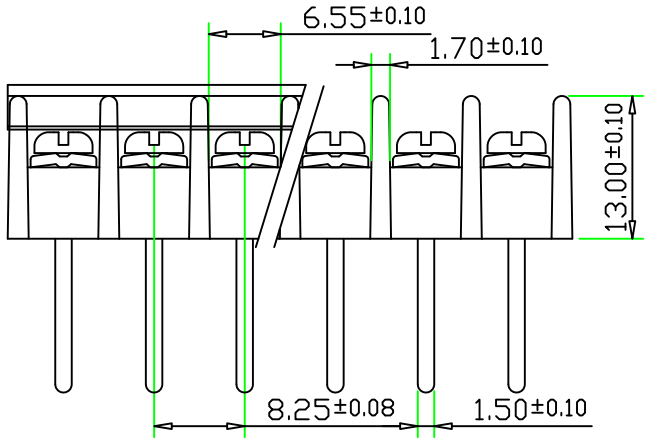

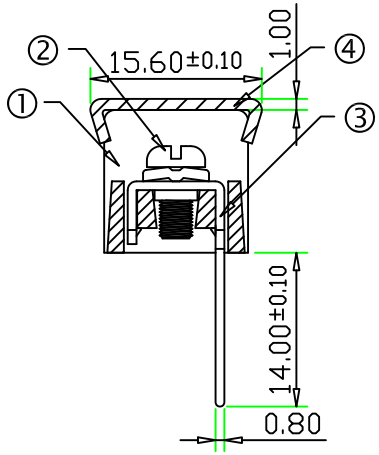

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	18.5	26.75	35	43.25	51.5	59.75	68	76.25	84.5	92.75	101	109.25	117.5	125.75
B	8.25	16.5	24.75	33	41.25	49.5	57.75	66	74.25	82.5	90.75	99	107.25	115.5

POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	134	142.25	150.5	158.75	167	175.25	183.5	191.75	200	208.25	216.5	224.75	233	241.25	249.5
B	123.75	132	140.25	148.5	156.75	165	173.25	181.5	189.75	198	206.25	214.5	222.75	231	239.25

文件發行
2009. 10. 7
林姿伶

ROHS

CO/Name	HOW DER ELECTRIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DrawingNo		DATE		DrawingNo	HD-81682503
P/Name	Barrier type terminal block	⚠			①							
					②		APPROVED		DATE		Scale	2:1(:)
					③						Sheet	1/1
http://www.howder-tw.com Tel:02-2223-1026					④		CHECK		DATE		Unit	mm
E-mail:howder.tb@msa.hinet.net Fax:02-2221-6471												