# HOW DER

SPECIFICATIONS

① Housing Material: Polyamide 66(UL94V-0), Black
② Screw: M3.0 Nickel Plated Steel
③ Terminals: Tin Plated Brass
④ Cover: PC Transparent

Screws Torque: 12 In-Lb
Wire Range: 14~18 AWG
Rated: 20 Amperes.AC300V
Operation Temperature: -55°C~+95°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

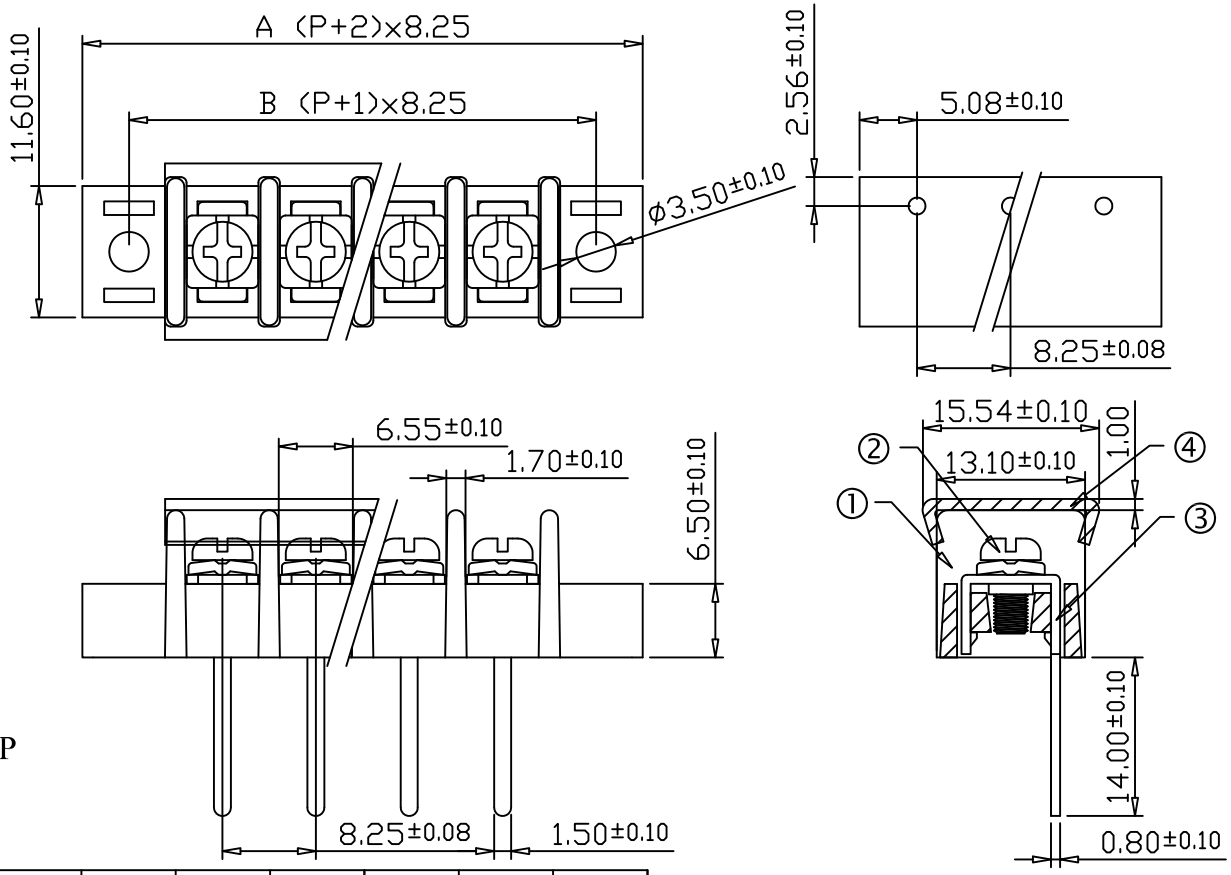


## Part Number:

HD-817-□PH-□

- □ (after PH-): C:With Cover
- □ (after HD-817-): Pole Size 02~30P

| POLE | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 | 14 | 15 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A | 33 | 41.25 | 49.5 | 57.75 | 66 | 74.25 | 82.5 | 90.75 | 99 | 107.25 | 115.5 | 123.75 | 132 | 140.25 |
| B | 24.75 | 33 | 41.25 | 49.5 | 57.75 | 66 | 74.25 | 82.5 | 90.75 | 99 | 107.25 | 115.5 | 123.75 | 132 |

| POLE | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A | 148.5 | 156.75 | 165 | 173.25 | 181.5 | 189.75 | 198 | 206.25 | 214.5 | 222.75 | 231 | 239.25 | 247.5 | 255.75 | 264 |
| B | 140.25 | 148.5 | 156.75 | 165 | 173.25 | 181.5 | 189.75 | 198 | 206.25 | 214.5 | 222.75 | 231 | 239.25 | 247.5 | 255.75 |

文件發行
2023.12.08
JULIA

ROHS

| CO/Name | HOW DER ELECTRONIC CO.,LTD | REV. | CONTENT | DATE | POLES | A | B | Drawing | | DATE | 2009/10/07 | DrawingNo | HD-81682505 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | ⚠ | | | 02P~06P | ±0.30 | ±0.20 | | | | | | |
| P/Name | Barrier type terminal block | | | | 07P~12P | ±0.35 | ±0.25 | APPROVED | | DATE | | Scale | 2:1( : ) |
| | | | | | 13P~18P | ±0.40 | ±0.30 | | | | | Sheet | 1/1 |
| http://www.howder-tw.com Tel:886-2-2223-1026 | | | | | 19P~24P | ±0.45 | ±0.35 | CHECK | | DATE | | Unit | mm |
| E-mail:info@howder-tw.com Fax:886-2-2221-6471 | | | | | 25P~30P | ±0.50 | ±0.40 | | | | | | |