

# HOW DER

## SPECIFICATIONS

- ① Housing Material: Phenolic , Black
- ② Screw: M3.0 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Screws Torque: 7 In-Lb

Wire Range: 14~22 WG

Rated: 10 Amperes.AC250V

Operation Temperature: -55°C~+150°C




Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

Part Number:

FTB-10-O-PH

Pole Size 2~24P

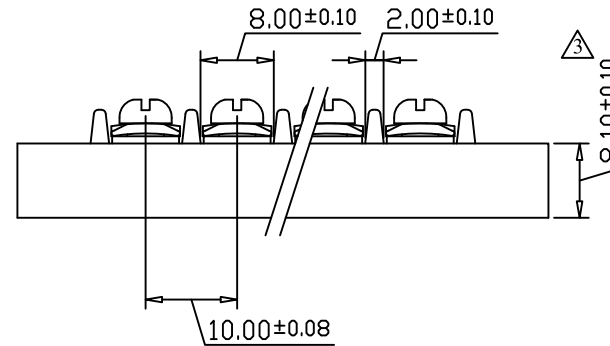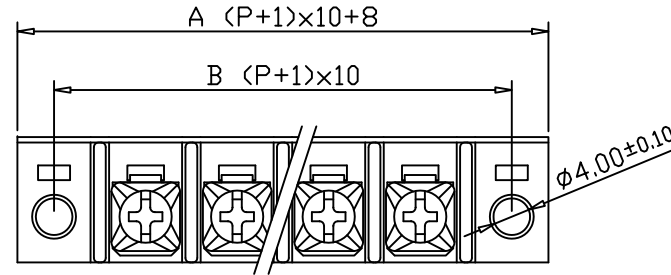

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	38	48	58	68	78	88	98	108	118	128	138	148	158	168
B	30	40	50	60	70	80	90	100	110	120	130	140	150	160
POLE	16	17	18	19	20	21	22	23	24					
A	178	188	198	208	218	228	238	248	258					
B	170	180	190	200	210	220	230	240	250					

文件發行  
2019.04.08  
黃琦婷



CO/Name	HOW DER ELECTRONIC CO.,LTD	REV.	CONTENT	DATE	NO.	A	B	Drawing	DATE	2009/08/26	DrawingNo	FTB-1012
P/Name	Phenolic type terminal block	△	尺寸修改13.8 修正13.7	20160304	02P-06P	±0.30	±0.20	APPROVED	DATE		Scale	2:1 ( : )
		△	尺寸修改11.9 修正11.8	20160304	07P-12P	±0.35	±0.25					
		△	尺寸修改8.1 修正8.2	20160304	13P-18P	±0.40	±0.30					
http://www.howder-tw.com Tel:02-2223-1026					19P-24P	±0.45	±0.35	CHECK	DATE		Sheet	1/1
E-mail:info@howder-tw.com Fax:02-2221-6471					25P-30P	±0.50	±0.40					