HOW DER

SPECIFICATIONS

① Housing Material: Phenolic , Black
② Screw: M3.0 Nickel Plated Steel
③ Terminals: Tin Plated Brass

Screws Torque: 7 In-Lb
Wire Range: 14~22 WG
Rated: 10 Amperes.AC250V
Operation Temperature: -55°C~+150°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

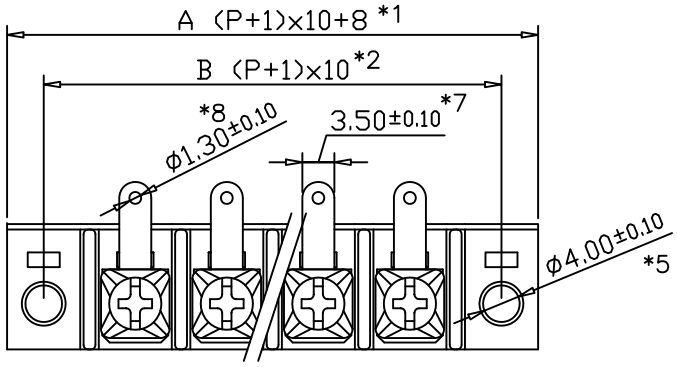

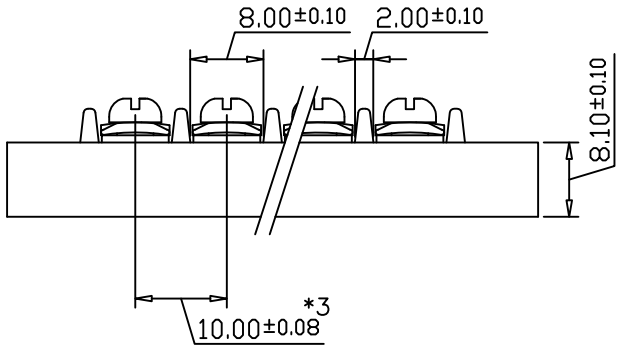

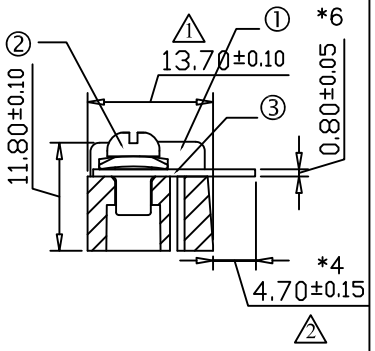

Part Number:

FTB-10-H-□PH

Pole Size 2~22P

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	38	48	58	68	78	88	98	108	118	128	138	148	158	168
B	30	40	50	60	70	80	90	100	110	120	130	140	150	160

POLE	16	17	18	19	20	21	22
A	178	188	198	208	218	228	238
B	170	180	190	200	210	220	230

文件發行 2020.07.06 張芳綾

ROHS

CO/Name	HOW DER ELECTRONIC CO.,LTD	REV.	CONTENT	DATE	NO.	A	B	Drawing		DATE	2009/08/26	DrawingNo	FTB-1006
P/Name	Barrier type terminal block	①	尺寸修改13.8修正13.7	20160304	02P~06P	±0.30	±0.20						
		②	尺寸修改3.9修正4.7	20200703	07P~12P	±0.35	±0.25	APPROVED		DATE		Scale	2:1(:)
					13P~18P	±0.40	±0.30					Sheet	1/1
http://www.howder-tw.com Tel:886-2-2223-1026					19P~24P	±0.45	±0.35	CHECK		DATE			
E-mail:info@howder-tw.com Fax:886-2-2221-6471					25P~30P	±0.50	±0.40					Unit	mm