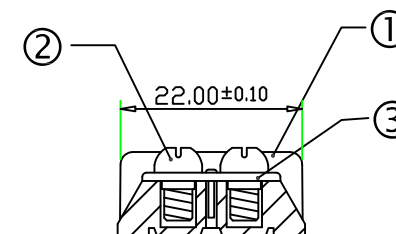
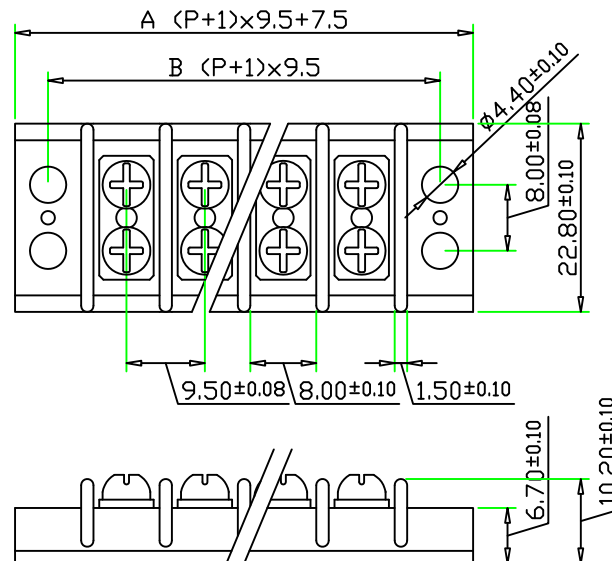


- ① Housing Material: Phenolic , Black
- ② Screw: M3.5 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Insulation resistance: >1000MΩ or more at DC500V

HD-10A-PH

- Pole Size 2~24P

Tolerance  $\pm 0.5$ 

|      |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| POLE | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | 11    | 12    | 13    | 14    | 15    |
| A    | 36    | 45.5  | 55    | 64.5  | 74    | 83.5  | 93    | 102.5 | 112   | 121.5 | 131   | 140.5 | 150   | 159.5 |
| B    | 28.5  | 38    | 47.5  | 57    | 66.5  | 76    | 85.5  | 95    | 104.5 | 114   | 123.5 | 133   | 142.5 | 152   |
| POLE | 16    | 17    | 18    | 19    | 20    | 21    | 22    | 23    | 24    |       |       |       |       |       |
| A    | 169   | 178.5 | 188   | 197.5 | 207   | 216.5 | 226   | 235.5 | 245   |       |       |       |       |       |
| B    | 161.5 | 171   | 180.5 | 190   | 199.5 | 209   | 218.5 | 228   | 237.5 |       |       |       |       |       |

林姿伶

[illegible]