

- ① Housing Material: Phenolic , Black
- ② Screw: M3.5 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Screws Torque: 12 In-Lb

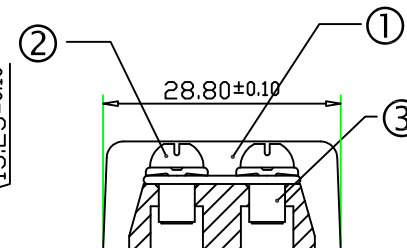
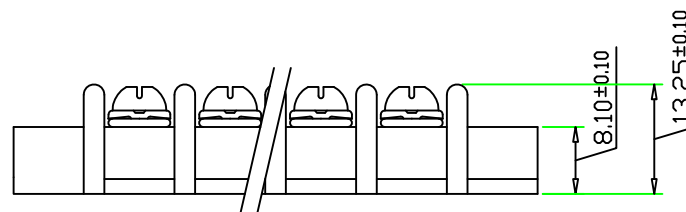
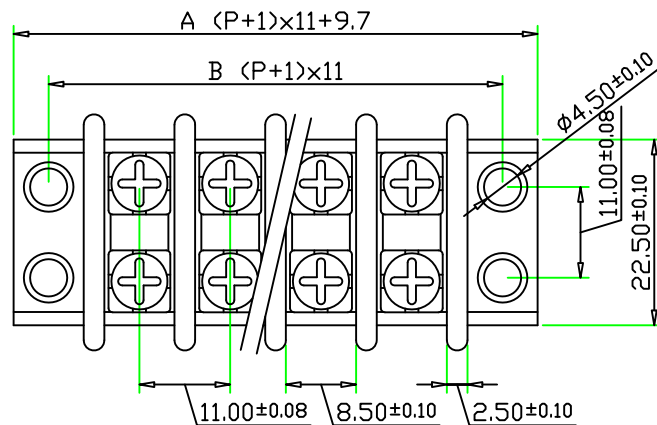
Wire Range: 12~18 WG

Rated: 20 Amperes.AC250V

Operation Temperature: -40°C~+160°C

Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

HD-20A-PH

- Pole Size 2~26P

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	42.7	53.7	64.7	75.7	86.7	97.7	108.7	119.7	130.7	141.7	152.7	163.7	174.7	185.7
B	33	44	55	66	77	88	99	110	121	132	143	154	165	176
POLE	16	17	18	19	20	21	22	23	24	25	26			
A	196.7	207.7	218.7	229.7	240.7	251.7	262.7	273.7	284.7	295.7	306.7			
B	187	198	209	220	231	242	253	264	275	286	297			

文件發行

2009. 8 .21

林姿伶

[illegible]