
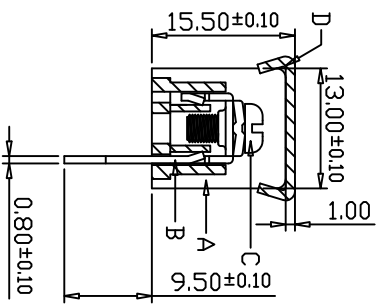
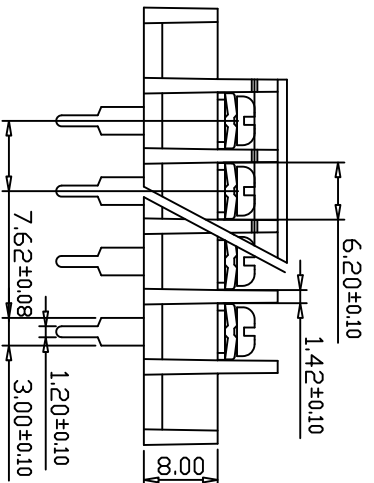


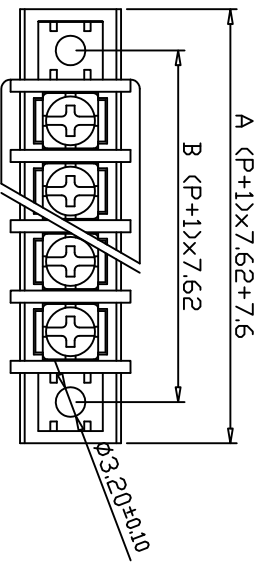

✓	Poles	A±0.30	B±0.20	17	144.76	137.16
02		30.46	22.86	18	152.38	144.78
03		38.08	30.48	↓	Poles	A±0.45 B±0.35
04		45.70	38.10	19	160.00	152.40
05		53.32	45.72	20	167.62	160.02
06		60.94	53.34	21	175.24	167.64
↓	Poles	A±0.35	B±0.25	22	182.86	175.26
07		68.56	60.96	23	190.48	182.88
08		76.18	68.58	24	198.10	190.50
09		83.80	76.20	↓	Poles	A±0.50 B±0.40
10		91.42	83.82	25	205.72	198.12
11		99.04	91.44	26	213.34	205.74
12		106.66	99.06	27	220.96	213.36
↓	Poles	A±0.40	B±0.30	28	228.58	220.98
13		114.28	106.68	29	236.20	228.60
14		121.90	114.30	30	243.82	236.22
15		129.52	121.92			
16		137.14	129.54			

Screws Torque: 12 In-Lb
Wire Range: 16~22 AWG
Rated: 15 Amperes, AC300V
Operation Temperature: -55°C~+105°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ DC500V

Part Number:
FTB-707-XXPH

02~30 Poles

Material	Plating/Finish	Remark
A Insulating body PA66 94V-0		Black
B Terminals	Brass	Tin
C Screws	Steel	Nickel
D Cover	PC	
E		

**HOW DER**
ELECTRONIC CO.,LTD

PART NAME
Terminal Blocks

UNIT
MM

REVISION

DESIGN	CHECK	APPROVED	DRAWING NO.	CERTIFIED	SHEET
DATE	DATE	DATE			1/1

