
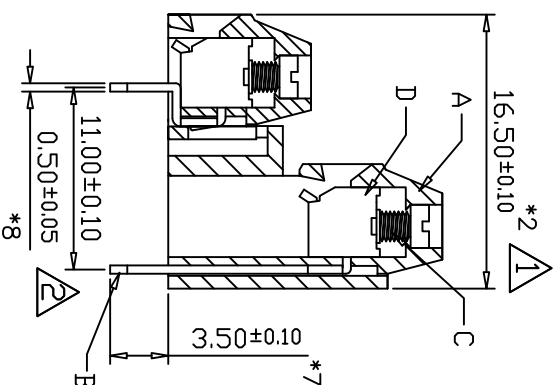
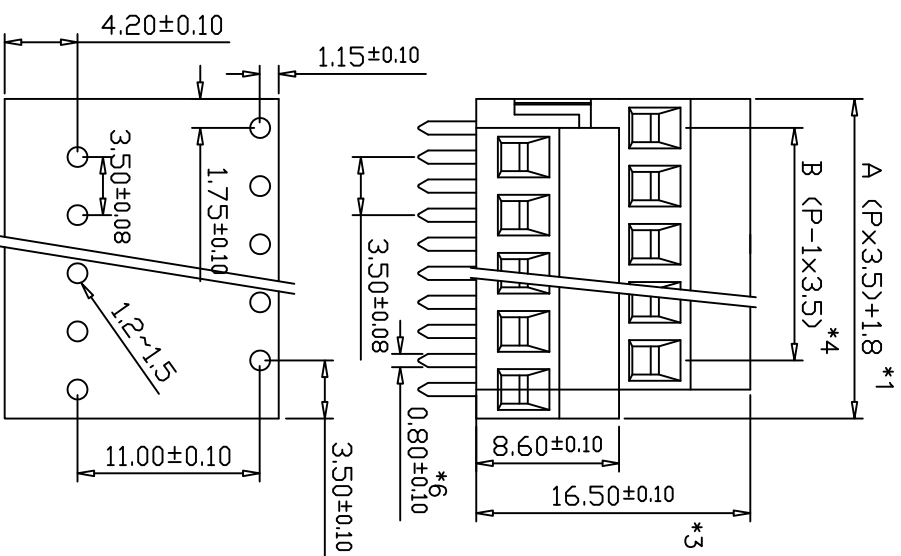


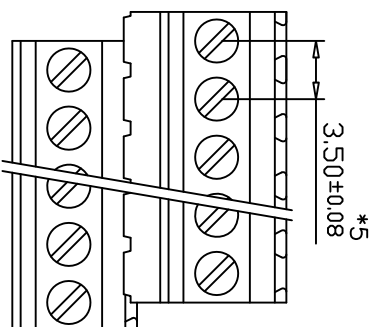

✓	Poles	A±0.30	B±0.20		17	61.3	56.0
	02	8.8	3.5		18	64.8	59.5
	03	12.3	7.0	↓	Poles	A±0.45	B±0.35
	04	15.8	10.5		19	68.3	63.0
	05	19.3	14.0		20	71.8	66.5
	06	22.8	17.5		21	75.3	70.0
↓	Poles	A±0.35	B±0.25		22	78.8	73.5
	07	26.3	21.0		23	82.3	77.0
	08	29.8	24.5		24	85.8	80.5
	09	33.3	28.0	↓	Poles	A±0.50	B±0.40
	10	36.8	31.5		25	89.3	84.0
	11	40.3	35.0		26	92.8	87.5
	12	43.8	38.5				
	↓						
	Poles	A±0.40	B±0.30				
	13	47.3	42.0				
	14	50.8	45.5				
	15	54.3	49.0				
	16	57.8	52.5				


Screws Torque: 1 In-Lb
Wire Range: 16~24 AWG
Rated: 10 Amperes, AC300V
Operation Temperature: -55°C~+115°C
Insulation withstands volt: AC1600V min
Insulation resistance: >1000MΩ DC500V

Part Number:

HD-352L-XXP

02~26 Poles

Material		Plating/Finish	Remark
A	Insulating body	PA66 UL 94V-0	Green
B	Terminal	Brass	Tin
C	Screw	Steel M2.0	Yellow Zinc
D	Cage Clamp	Brass	Tin
E			



HOW DER ELECTRONIC CO., LTD

PART NAME	Terminal Blocks
-----------	-----------------

UNIT	MM
------	----

	REVISION
--	----------

DESIGN	CHECK	AP
	Sam	
DATE	DATE	DATE
2009/09/03	2020/07/13	

COVERED	DRAWING NO.	CERTIFIED		SHEET
				1/1

http://www.howder-tw.com
E-mail:info@howder-tw.com

Tel:886-2-2223-1026
Fax:886-2-2221-6471

