HOW DER

DATE 20090727

SPECIFICATIONS

① Housing Material: Polyamide 66(UL94V-0), Green
② Screw: M2.6 Zinc Plated Steel
③ Wire Clamp: Nickel Plated Brass
④ Contact: Tin Plated Phosphorus Bronze

Screws Torque: 7 In-Lb
Wier Range: 12~16 AWG
Rated: 12 Amperes.AC250V
Operation Temperature: -55°C~+115°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

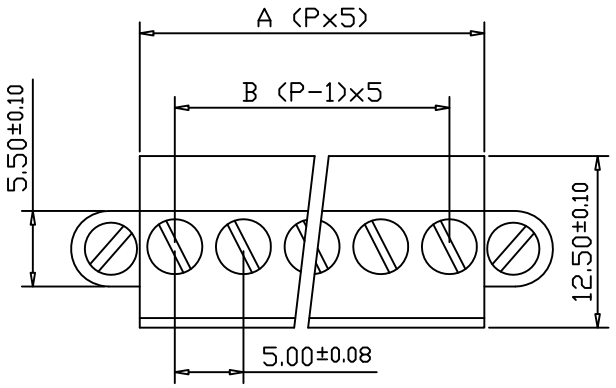

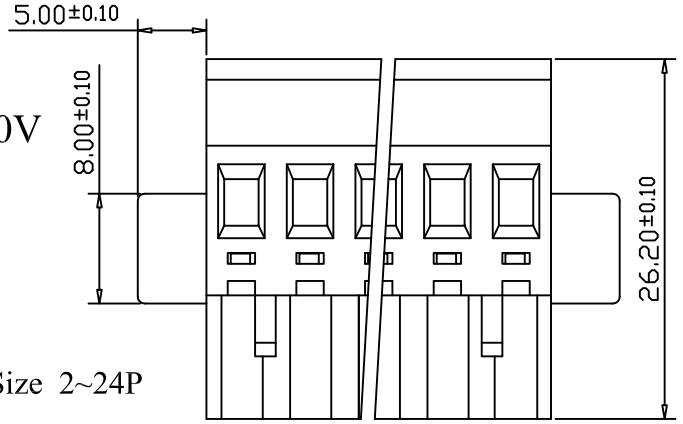

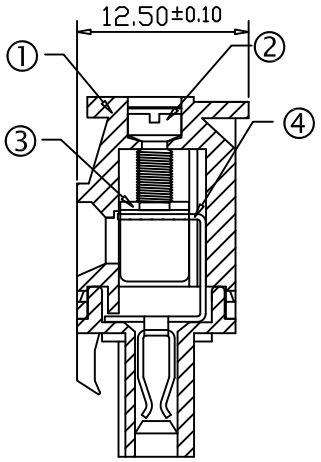

Part Number:

HD-515MTE-□P

Pole Size 2~24P

Tolerance ± 0.50

POLE	2	3	4	5	6	7	8	9	10	11	12
A	10	15	20	25	30	35	40	45	50	55	60
B	5	10	15	20	25	30	35	40	45	50	55

POLE	13	14	15	16	17	18	19	20	21	22	23	24
A	65	70	75	80	85	90	95	100	105	110	115	120
B	60	65	70	75	80	85	90	95	100	105	110	115

文件發行
2018.08.24
黃琦婷

ROHS

CO/Name	HOW DER ELECTRIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DRAWING		DATE		DRAWING NO	HD-5155008
P/Name	Pluggable type terminal block						APPROVED		DATE		SCALE	2:1(:)
											SHEET	1/1
http://www.howder-tw.com Tel:02-2223-1026							CHECK		DATE		UNIT	MM
E-mail:howder.tb@msa.hinet.neta Fax:02-2221-6471												