HOW DER

SPECIFICATIONS

① Housing Material: Polyamide 66(UL94V-0), Black
② Screw: M3.0 Nickel Plated Steel
③ Terminals: Tin Plated Brass
④ Cover: PC Transparent

Screws Torque: 12 In-Lb
Wire Range: 16~22 AWG
Rated: 15 Amperes.AC300V
Operation Temperature: -55°C~+105°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

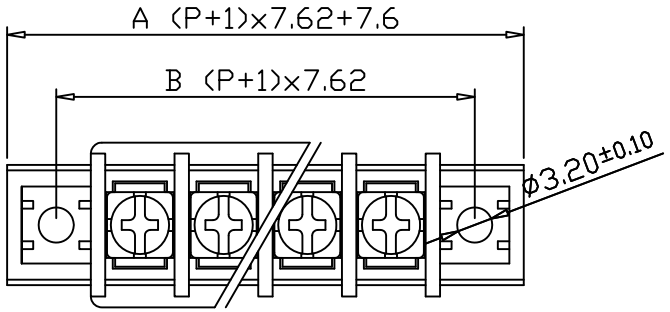

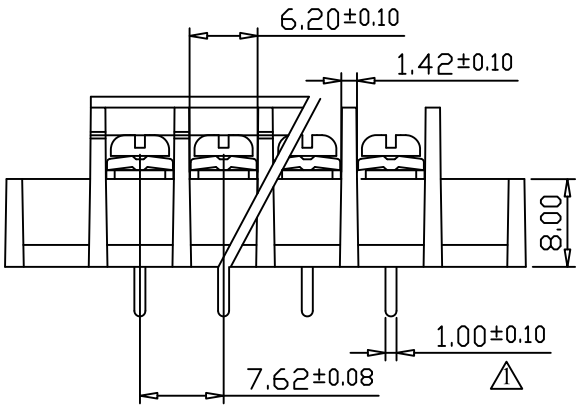

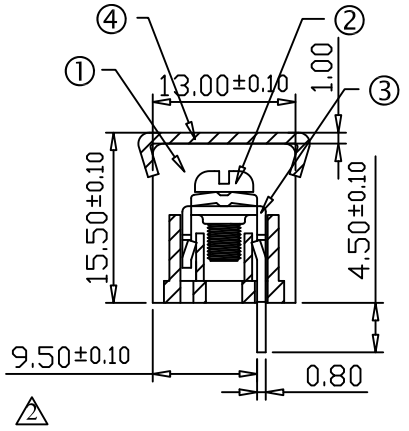

Part Number:

FTB-702-□PH-□

C:With Cover

Pole Size 2~30P

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	30.46	38.08	45.7	53.32	60.94	68.56	76.18	83.8	91.42	99.04	106.66	114.28	121.9	129.52
B	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44	99.06	106.68	114.3	121.92

POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	137.14	144.76	152.38	160	167.62	175.24	182.86	190.48	198.1	205.72	213.34	220.96	228.58	236.2	243.82
B	129.54	137.16	144.78	152.4	160.02	167.64	175.26	182.88	190.5	198.12	205.74	213.36	220.98	228.6	236.22

文件發行 2018.11.21 黃琦婷

ROHS

CO/Name	HOW DER ELECTRONIC CO.,LTD	REV.	CONTENT	DATE	POLES	A	B	Drawing		DATE	20160306	DrawingNo	FTB-7076205
P/Name	Barrier type terminal block	1	尺寸修改1.1修改1.0	2017 0715	02P~06P	±0.30	±0.20						
		2	尺寸修改9.55修改9.5	2017 0715	07P~12P	±0.35	±0.25	APPROVED		DATE		Scale	2:1(:)
					13P~18P	±0.40	±0.30						
http://www.howder-tw.com Tel:02-2223-1026					19P~24P	±0.45	±0.35	CHECK		DATE		Sheet	1/1
E-mail:info@howder-tw.com Fax:02-2221-6471					25P~30P	±0.50	±0.40					Unit	mm