

# HOW DER

DATE 2009/09/18

## SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Black
- ② Screw: M4.0 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass
- ④ Cover: PC Transparent

Screws Torque: 15.7 In-Lb

Wire Range: 12~22 AWG

Rated: 25 Amperes.AC300V

Operation Temperature: -55°C~+95°C

Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V


## Part Number:

HD-307-P-

C: With Cover

Pole Size 2~30P

Tolerance ± 0.5

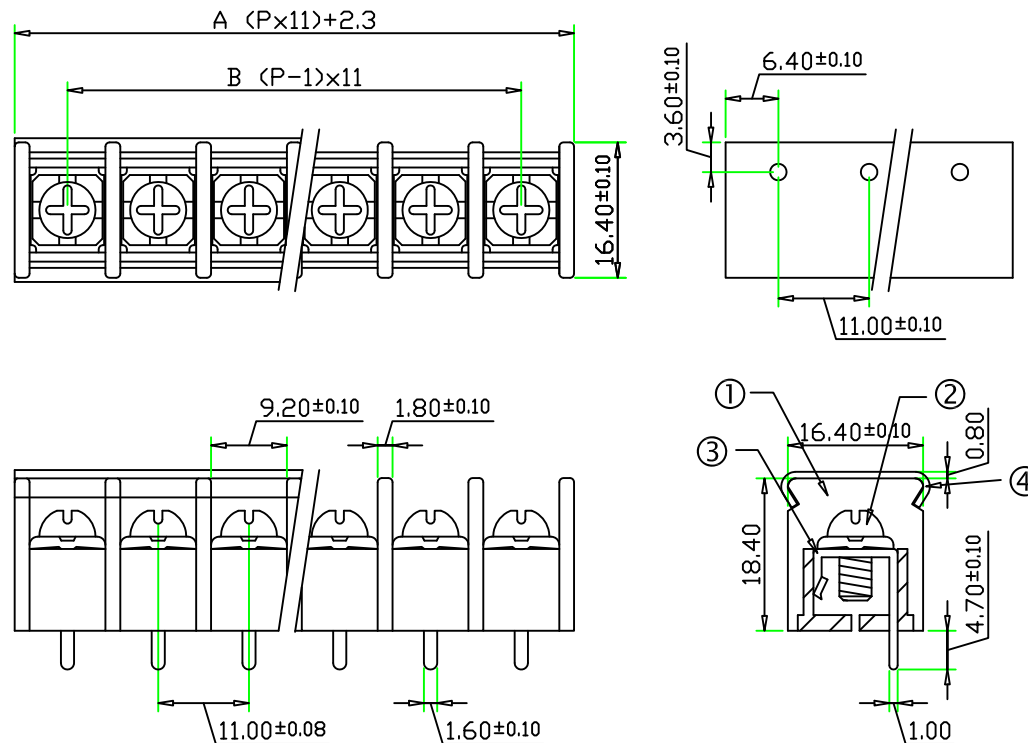

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
A	24.3	35.3	46.3	57.3	68.3	79.3	90.3	101.3	112.3	123.3	134.3	145.3	156.3	167.3	
B	11	22	33	44	55	66	77	88	99	110	121	132	143	154	
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	178.3	189.3	200.3	211.3	222.3	233.3	244.3	255.3	266.3	277.3	288.3	299.3	310.3	321.3	332.3
B	165	176	187	198	209	220	231	242	253	264	264	264	264	264	264

文件發行  
2009 09 .18  
林姿伶



CO/Name	HOW DER ELECTRIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DrawingNo	DATE	DrawingNo	HD-3001112
P/Name	Barrier type terminal block				①				Scale	2:1( : )
					②		APPROVED	DATE	Sheet	1/1
					③				Unit	mm
					④		CHECK	DATE		

http://www.howder-tw.com Tel:02-2223-1026  
E-mail:howder.tb@msa.hinet.net Fax:02-2221-6471