HOW DER

DATE	2009/08/21

SPECIFICATIONS

① Housing Material: Phenolic , Black
② Screw: M3.5 Nickel Plated Steel
③ Terminals: Tin Plated Brass

Screws Torque: 12 In-Lb
Wire Range: 14~18 WG
Rated: 10 Amperes.AC250V
Operation Temperature: -55°C~+150°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

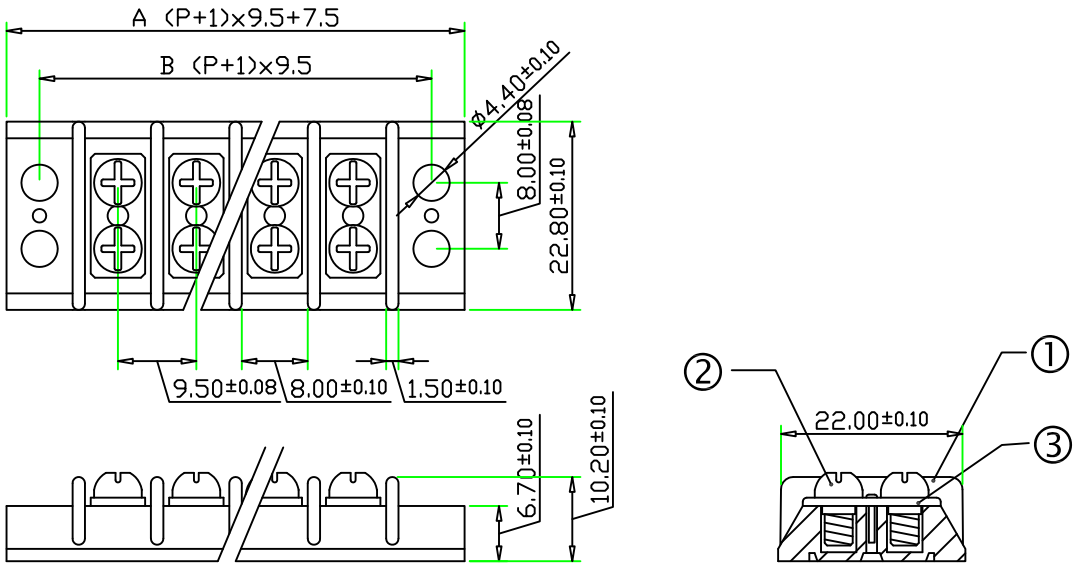

Part Number:

HD-10A-□PH

Pole Size 2~26P

Tolerance ± 0.8

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	36	45.5	55	64.5	74	83.5	93	102.5	112	121.5	131	140.5	150	159.5
B	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133	142.5	152

POLE	16	17	18	19	20	21	22	23	24	25	26
A	169	178.5	188	197.5	207	216.5	226	235.5	245	254.5	264
B	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5

文件發行
2009.09.30
黃琦婷

ROHS

CO/Name	HOW DER ELECTRIC CO.,LTD	REV.	CONTENT	DATE	NO.	PART NO.	DrawingNo		DATE		DrawingNo	HD-10A95002
P/Name	Double row type terminal block				①							
					②		APPROVED		DATE		Scale	2:1(:)
					③							
http://www.howder-tw.com Tel:02-2223-1026					④		CHECK		DATE		Sheet	1/1
E-mail:howder.tb@msa.hinet.net Fax:02-2221-6471											Unit	mm